

O-Rings - Buna-N

Ordering Information


Part Number: Prefix - ID X CS

Example: MOR - 3 X 1

Please specify 70 or 90 Durometer Buna-N Rubber when ordering.

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -40 to +220° F

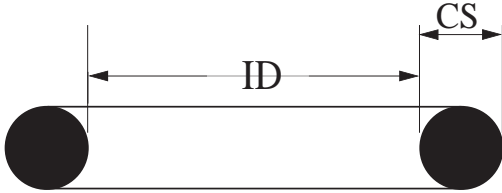

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
3.00	1.0	30	\$.16		
5.00	1.0	20	.232		
13.00	1.0			6	\$.70
14.00	1.0	20	.123		
15.00	1.0	20	.123		
16.00	1.0	20	.123		
19.00	1.0	20	.128		
21.00	1.0	20	.134		
55.00	1.0	20	.14		
0.74	1.02	20	.021		
1.07	1.27	20	.021		
4.70	1.42	20	.016		
2.50	1.5	20	.056		
3.00	1.5	20	.056		
3.50	1.5	20	.056		
4.00	1.5	20	.061		
4.50	1.5	20	.066		
5.00	1.5	25	.067	25	.20
5.50	1.5	25	.07		
6.00	1.5	25	.074		
6.50	1.5	25	.074		
7.00	1.5	25	.074		
7.50	1.5	25	.074		
8.00	1.5	25	.074		
8.50	1.5	22	.074		
9.00	1.5	22	.074		
9.50	1.5	22	.074		
10.00	1.5	22	.086		
11.00	1.5	35	.086		
11.50	1.5	35	.086		
12.00	1.5	22	.086		
13.00	1.5	25	.088	25	.18
13.50	1.5	25	.097		
14.00	1.5	25	.097		
14.50	1.5	25	.099		
15.00	1.5	25	.099		
15.50	1.5	25	.101		
16.00	1.5	18	.116	18	.27
17.00	1.5	8	.134		
17.50	1.5	18	.134		

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
18.00	1.5	18	\$.134		
19.00	1.5	18	.134		
19.50	1.5	18	.134		
20.00	1.5	18	.134		
21.00	1.5	18	.158		
21.50	1.5	18	.158		
22.00	1.5	15	.158		
23.00	1.5	15	.158		
24.00	1.5	15	.158		
25.00	1.5	15	.158		
26.00	1.5	15	.186		
27.00	1.5	15	.186		
28.00	1.5	15	.186		
30.00	1.5	15	.186		
31.00	1.5	15	.234		
32.00	1.5	15	.234		
35.00	1.5	15	.234		
36.00	1.5	15	.262		
38.00	1.5	15	.262		
39.00	1.5	15	.262		
40.00	1.5	15	.262		
41.00	1.5	8	.58		
42.00	1.5	6	.76		
43.00	1.5	6	.29		
45.00	1.5	6	.29		
46.00	1.5	6	.331		
47.00	1.5	6	.331		
53.00	1.5	6	.338		
55.00	1.5	6	.357		
57.00	1.5	6	.384		
64.00	1.5	6	.392		
65.00	1.5	6	.394		
71.00	1.5	6	.399		
72.00	1.5	6	.40		
77.00	1.5	6	.422		
95.00	1.5	6	.804		
1.42	1.52	50	.021		
2.20	1.6	35	.12	35	\$.14
3.10	1.6	35	.066	35	.16
4.10	1.6	35	.066	35	.17

O-Rings - Buna-N

Ordering Information


Part Number: Prefix - ID X CS

Example: MOR - 3 X 1

Please specify 70 or 90 Durometer Buna-N Rubber when ordering.

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -40 to +220° F

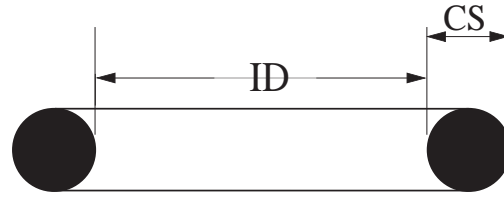

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
5.10	1.6	35	\$.074		
6.10	1.6	35	.074		
7.10	1.6	25	.074	25	\$.18
8.10	1.6	15	.074		
9.10	1.6	25	.085	25	.18
10.10	1.6	18	.085	18	.22
11.10	1.6	18	.085		
12.10	1.6	25	.10		
13.10	1.6	18	.10	18	.23
14.10	1.6	18	.10		
15.10	1.6	18	.115		
16.10	1.6	18	.119		
17.10	1.6	18	.12		
18.10	1.6	10	.12		
19.10	1.6	10	.12		
22.10	1.6	10	.157		
25.10	1.6	10	.186		
27.10	1.6	10	.186		
29.10	1.6	10	.186		
32.10	1.6	10	.235		
35.10	1.6	10	.262		
37.10	1.6	10	.262		
6.07	1.63	50	.019		
7.65	1.63	50	.02		
1.78	1.78	50	.021		
2.57	1.78	50	.021		
2.90	1.78	50	.016		
3.68	1.78	50	.016		
4.47	1.78	50	.016		
5.28	1.78	50	.016		
6.07	1.78	50	.017		
7.65	1.78	50	.021		
9.25	1.78	50	.021		
10.82	1.78	50	.023		
12.42	1.78	50	.023		
14.00	1.78	50	.027		
15.60	1.78	50	.028		
17.17	1.78	50	.032		
18.77	1.78	50	.034		
20.35	1.78	50	.038		

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
21.95	1.78	50	\$.038		
23.52	1.78	50	.039		
25.12	1.78	50	.043		
26.70	1.78	50	.048		
28.30	1.78	50	.048		
29.87	1.78	50	.052		
31.47	1.78	50	.059		
33.05	1.78	50	.06		
34.65	1.78	50	.063		
37.82	1.78	50	.066		
41.00	1.78	50	.079		
44.17	1.78	30	.088		
47.35	1.78	30	.099		
50.52	1.78	30	.121		
53.70	1.78	30	.132		
56.87	1.78	30	.132		
60.05	1.78	30	.142		
63.22	1.78	30	.143		
66.40	1.78	30	.154		
69.57	1.78	20	.163		
72.75	1.78	20	.168		
75.92	1.78	20	.192		
82.27	1.78	20	.21		
88.62	1.78	10	.221		
94.97	1.78	10	.257		
101.32	1.78	10	.266		
107.67	1.78	10	.288		
114.02	1.78	10	.321		
120.37	1.78	10	.377		
126.72	1.78	6	.488		
133.07	1.78	6	.488		
6.30	1.8	70	.044		
7.50	1.8	70	.047		
9.50	1.8	70	.05		
10.60	1.8	70	.051		
12.50	1.8	70	.054		
13.3	1.8	70		3	\$ 1.60
8.92	1.83	70	.02		
10.52	1.83	70	.021		
2.80	1.9	35	.122	30	.16

O-Rings - Buna-N

Ordering Information


Part Number: Prefix - ID X CS

Example: MOR - 3 X 1

Please specify 70 or 90 Durometer Buna-N Rubber when ordering.

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -40 to +220° F

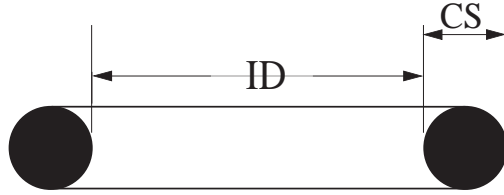

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
3.80	1.9	35	\$.122	30	\$.184
4.80	1.9	35	.122	30	.184
5.80	1.9	25	.122	25	.184
6.80	1.9	25	.133	25	.201
7.80	1.9	25	.133	25	.282
8.80	1.9	25	.188	25	.282
9.80	1.9	25	.188	25	.282
15.80	1.9	25	.18	25	.18
11.89	1.98	25	.023		
3.00	2.0	45	.067		
4.00	2.0	45	.067	45	.13
5.00	2.0	45	.067		
6.00	2.0	45	.074	45	.18
7.00	2.0	45	.074		
8.00	2.0	35	.074	8	.17
9.00	2.0	35	.074	35	.44
10.00	2.0	35	.085	8	.49
11.00	2.0	20	.085		
12.00	2.0	35	.086	35	.20
12.50	2.0	35	.089		
13.00	2.0	35	.10		
14.00	2.0	35	.10		
15.00	2.0	25	.10		
16.00	2.0	25	.115		
17.00	2.0	25	.118		
18.00	2.0	15	.119		
19.00	2.0	25	.119	25	.32
20.00	2.0	25	.119	25	.38
21.00	2.0	25	.158		
21.90	2.0	25	Call		
22.00	2.0	20	.158		
23.00	2.0	20	.158		
23.50	2.0	13	.158		
24.00	2.0	20	.22		
24.20	2.0	15	.31		
24.50	2.0	18	.171		
25.50	2.0	18	.173		
26.00	2.0	18	.173		
27.00	2.0	18	.174		
27.50	2.0	18	.176		

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
28.00	2.0	18	\$.186		
28.50	2.0	13	.187		
29.00	2.0	13	.187		
29.50	2.0	13	.199		
30.00	2.0	13	.199		
31.00	2.0	13	.21		
31.50	2.0	13	.21		
33.00	2.0	13	.221		
33.50	2.0	13	.221		
34.00	2.0	13	.226		
34.50	2.0	13	.229		
35.00	2.0	10	.234		
35.50	2.0	10	.236		
36.00	2.0	10	.234		
36.50	2.0	10	.234		
37.00	2.0	10	.234		
37.50	2.0	9	.243		
38.50	2.0	12	.248		
39.00	2.0	12	.248		
39.50	2.0	12	.248		
40.00	2.0	12	.248		
41.50	2.0	12	Call		
42.00	2.0	8	.45		
42.50	2.0	10	Call		
43.00	2.0	10	.29		
43.50	2.0	10	Call		
44.00	2.0	10	.29		
44.50	2.0	10	Call		
45.00	2.0	1	.29		
45.50	2.0	5	Call		
46.00	2.0	5	.332		
47.00	2.0	5	.332		
47.50	2.0	5	Call		
48.00	2.0	5	.332		
49.50	2.0	5	Call		
50.00	2.0	15	.332		
51.00	2.0	5	.333		
52.00	2.0	5	.357		
52.50	2.0	5	Call		
53.00	2.0	8	.54		

O-Rings - Buna-N

Ordering Information


Part Number: Prefix - ID X CS

Example: MOR - 3 X 1

Please specify 70 or 90 Durometer Buna-N Rubber when ordering.

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -40 to +220° F

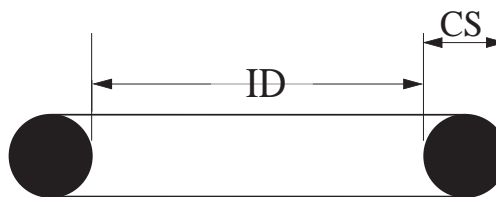

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
54.50	2.0	8	Call		
55.00	2.0	8	\$.54		
55.50	2.0	5	Call		
56.00	2.0	5	.357		
57.00	2.0	5	.384		
58.00	2.0	5	.384		
59.00	2.0	5	.385		
59.50	2.0	5	Call		
62.50	2.0	5	Call		
63.00	2.0	6	.477		
64.00	2.0	6	.477		
64.50	2.0	6	Call		
66.00	2.0	6	.517		
66.50	2.0	6	Call		
67.00	2.0	6	.79		
68.00	2.0	5	.517		
69.50	2.0	4	Call		
70.00	2.0	5	.517		
70.50	2.0	5	Call		
72.00	2.0	5	.571		
73.00	2.0	5	.571		
74.00	2.0	5	.571		
74.50	2.0	5	Call		
75.00	2.0	5	.571		
76.00	2.0	5	.597		
78.00	2.0	5	.597		
79.00	2.0	5	.597		
79.50	2.0	10	1.45		
80.00	2.0	5	.597		
84.50	2.0	3	Call		
85.00	2.0	3	.637		
86.00	2.0	3	.677		
87.00	2.0	3	.677		
88.00	2.0	3	.677		
89.50	2.0	3	Call		
90.00	2.0	3	.678	35	.15
93.00	2.0	3	.678		
94.00	2.0	3	.809		
94.50	2.0	3	Call		
96.00	2.0	3	.809		

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
99.50	2.0	3	Call		
100.00	2.0	6	\$.811		
104.50	2.0	6	Call		
109.50	2.0	6	Call		
111.50	2.0	6	Call		
114.50	2.0	6	Call	2	\$ 1.45
119.50	2.0	6	Call		
124.50	2.0	6	Call		
129.50	2.0	6	Call		
131.50	2.0	6	Call		
134.50	2.0	6	Call		
139.50	2.0	6	Call		
144.50	2.0	6	Call		
149.50	2.0	6	Call		
13.46	2.08	50	.027		
16.36	2.21	50	.038		
3.30	2.4	35	.074		
3.60	2.4	35	.075		
4.30	2.4	35	.075	35	.15
4.60	2.4	35	.075		
5.30	2.4	35	.075	35	.17
5.60	2.4	35	.075	35	.15
6.30	2.4	35	.075		
6.60	2.4	35	.075		
7.30	2.4	35	.075		
7.60	2.4	30	.075	30	.18
8.30	2.4	30	.075	30	.17
8.60	2.4	30	.075	30	.17
9.30	2.4	25	.086		
9.60	2.4	25	.086		
9.80	2.4	25	.20	25	.20
10.30	2.4	25	.0903		
10.60	2.4	25	.094		
10.80	2.4	25	.20	25	.301
11.00	2.4	25	.20	25	.20
11.30	2.4	25	.094	25	.20
11.60	2.4	25	.094		
11.80	2.4	25	.243	25	.20
12.30	2.4	25	.10	25	.22
12.60	2.4	25	.10		

O-Rings - Buna-N

Ordering Information


Part Number: Prefix - ID X CS

Example: MOR - 3 X 1

Please specify 70 or 90 Durometer Buna-N Rubber when ordering.

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -40 to +220° F

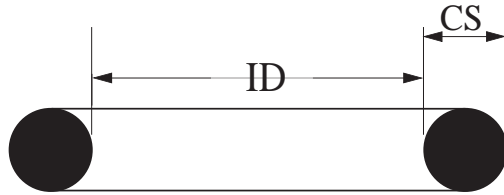

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
12.80	2.4	25	\$.20	25	\$.22
13.30	2.4	20	.105		
13.60	2.4	20	.105		
13.80	2.4	25	.243	20	.366
13.80	2.4V	5	.826	4	1.23
14.30	2.4	25	.105		
14.60	2.4	25	.105		
14.80	2.4	25	.279	20	.419
14.80	2.4V	5	.862		
15.30	2.4	15	.133		
15.60	2.4	15	.133		
15.80	2.4	18	.279	18	.419
16.30	2.4	18	.133	11	.42
16.60	2.4	18	.133	11	.42
16.80	2.4			18	.26
17.30	2.4	18	.133	18	.26
17.60	2.4	18	.133		
17.80	2.4	18	.348	18	.522
18.60	2.4	18	.134		
18.80	2.4	18	.24	18	.26
19.60	2.4	18	.134		
19.80	2.4	18	.348	18	.522
20.80	2.4	18	.383	16	.576
21.60	2.4	18	.134		
21.80	2.4	18	.383	16	.576
24.60	2.4	18	.134		
27.30	2.4	12	.38		
27.60	2.4	15	.135		
29.60	2.4	15	.135		
31.60	2.4	15	.137		
33.25	2.4	15	.33		
34.60	2.4	15	.144		
37.60	2.4	15	.147		
39.60	2.4	8	.15		
41.60	2.4	8	.15		
44.60	2.4	5	.15		
49.60	2.4	8	.65		
52.80	2.4	3	3.61	16	.28
54.60	2.4	6	.72		
69.60	2.4	3	1.70		

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
7.00	2.5	25	\$.20		
10.00	2.5	25	.20	8	\$.56
11.00	2.5	25	.20		
12.00	2.5	25	.20		
13.00	2.5	25	.20	25	.22
13.00	2.5V	6	.76		
14.00	2.5	18	.24	18	.26
15.00	2.5	18	.26	6	.63
16.00	2.5	18	.26	6	.63
17.00	2.5	15	.30	15	.32
17.00	2.5V	4	1.08		
18.00	2.5	15	.30	15	.32
19.00	2.5	12	.36		
20.00	2.5	15	.30		
28.00	2.5	12	.36		
37.50	2.5	10	.46		
47.00	2.5	7	.70		
47.60	2.4	7	.208		
48.00	2.5	7	.62		
49.60	2.4	7	.231		
51.60	2.4	7	.233		
54.60	2.4	7	.241		
57.60	2.4	7	.241		
58.00	2.5	4	.96		
59.00	2.5	6	.74		
59.60	2.4	6	.259		
61.60	2.4	6	.278		
64.60	2.4	6	.281		
67.60	2.4	6	.297		
69.00	2.5	6	.76		
69.60	2.4	6	.306		
17.93	2.46	50	.038		
19.18	2.46	50	.043		
4.00	2.5	25	.074		
5.00	2.5	25	.074		
6.00	2.5	25	.074		
7.00	2.5	25	.074		
8.00	2.5	25	.074		
9.00	2.5	25	.074		
10.00	2.5	20	.086		

O-Rings - Buna-N

Ordering Information


Part Number: Prefix - ID X CS

Example: MOR - 3 X 1

Please specify 70 or 90 Durometer Buna-N Rubber when ordering.

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -40 to +220° F

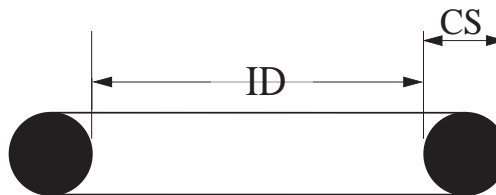

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
11.00	2.5	20	\$.092		
12.00	2.5	20	.092		
13.00	2.5	20	.099		
14.00	2.5	20	.104		
15.00	2.5	20	.104		
16.00	2.5	15	.132		
17.00	2.5	15	.132		
18.00	2.5	15	.133		
19.00	2.5	15	.134		
21.00	2.5	12	.157		
22.00	2.5	12	.157		
23.00	2.5	12	.157		
24.00	2.5	12	.157		
25.00	2.5	12	.158		
25.50	2.5	10	.176		
26.00	2.5	10	.185		
26.50	2.5	10	.186		
27.00	2.5	10	.185		
28.00	2.5	10	.186		
29.00	2.5	10	.186		
30.00	2.5	10	.186		
31.00	2.5	8	.234		
32.00	2.5	8	.234		
32.50	2.5	8	.234		
33.00	2.5	8	.234		
33.50	2.5	8	.238		
35.00	2.5	8	.235		
35.50	2.5	8	.262		
36.00	2.5	8	.262		
36.50	2.5	8	.262		
37.00	2.5	8	.262		
38.00	2.5	8	.262		
38.50	2.5	8	.263		
39.00	2.5	8	.263		
40.00	2.5	8	.263		
42.00	2.5	8	.29		
43.00	2.5	8	.29		
44.00	2.5	8	.29		
45.00	2.5	8	.29		
46.00	2.5	6	.33		

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
47.00	2.5	6	\$.33		
48.00	2.5	6	.331		
49.00	2.5	6	.338		
50.00	2.5	6	.338		
53.00	2.5	6	.357		
54.00	2.5	6	.357		
55.00	2.5	6	.357		
57.00	2.5	6	.358		
58.00	2.5	6	.385		
60.00	2.5	6	.385		
63.00	2.5	6	.477		
65.00	2.5	6	.477		
67.00	2.5	6	.517		
70.00	2.5	6	.517		
72.00	2.5	6	.518		
73.00	2.5	6	.86		
75.00	2.5	3	.57		
76.00	2.5	3	.598		
80.00	2.5	3	.598		
85.00	2.5	3	.636		
90.00	2.5	3	.676		
94.00	2.5	3	.809		
100.00	2.5	3	.809		
107.00	2.5	3	.81		
115.00	2.5	3	.811		
116.00	2.5	3	1.55		
120.00	2.5	3	.879		
130.00	2.5	3	.879		
136.00	2.5	3	.88		
140.00	2.5	3	10.20		
1.24	2.62	50	.03		
2.06	2.62	50	.03		
2.84	2.62	50	.021		
3.63	2.62	50	.021		
4.42	2.62	50	.021		
5.23	2.62	50	.021		
6.02	2.62	50	.021		
7.59	2.62	50	.021		
9.19	2.62	50	.024		
9.90	2.62	50	.066		

O-Rings - Buna-N

Ordering Information


Part Number: Prefix - ID X CS

Example: MOR - 3 X 1

Please specify 70 or 90 Durometer Buna-N Rubber when ordering.

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -40 to +220° F

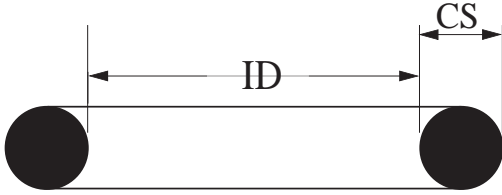

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
10.77	2.62	50	\$.026		
12.37	2.62	50	.026		
13.94	2.62	50	.027		
15.54	2.62	50	.03		
17.12	2.62	50	.03		
18.72	2.62	50	.032		
20.30	2.62	50	.032		
21.89	2.62	50	.039		
23.47	2.62	50	.041		
25.07	2.62	50	.043		
26.64	2.62	50	.048		
28.24	2.62	50	.048		
29.82	2.62	50	.048		
31.42	2.62	35	.057		
32.99	2.62	35	.057		
34.59	2.62	35	.066		
36.17	2.62	35	.074		
37.77	2.62	35	.081		
39.34	2.62	35	.081		
40.94	2.62	20	.088		
42.52	2.62	20	.09		
44.12	2.62	20	.094		
45.69	2.62	20	.101		
47.29	2.62	20	.101		
48.90	2.62	20	.101		
50.47	2.62	20	.108		
52.07	2.62	20	.108		
53.64	2.62	15	.123		
55.25	2.62	15	.123		
56.82	2.62	15	.123		
58.42	2.62	15	.137		
59.99	2.62	15	.139		
61.60	2.62	15	.143		
63.17	2.62	10	.154		
64.77	2.62	10	.154		
66.34	2.62	10	.154		
67.95	2.62	10	.154		
69.52	2.62	10	.154		
71.12	2.62	10	.163		
72.69	2.62	10	.163		

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
75.87	2.62	10	\$.177		
82.22	2.62	10	.21		
88.57	2.62	10	.221		
94.92	2.62	10	.221		
101.27	2.62	8	.288		
107.62	2.62	5	.354		
113.97	2.62	5	.366		
120.32	2.62	5	.377		
126.67	2.62	5	.41		
133.02	2.62	4	.443		
139.37	2.62	4	.488		
145.72	2.62	4	.577		
152.07	2.62	3	.599		
158.42	2.62	3	.666		
164.77	2.62	3	.688		
171.12	2.62	3	.688		
177.47	2.62	3	.688		
183.82	2.62	3	.754		
190.17	2.62	3	.777		
196.52	2.62	3	.799		
202.87	2.62	2	.999		
209.22	2.62	2	1.043		
215.57	2.62	2	1.11		
221.92	2.62	2	1.221		
228.27	2.62	2	1.332		
234.62	2.62	2	1.443		
240.97	2.62	2	1.488		
247.32	2.62	2	1.554		
14.00	2.65	15	.106		
15.00	2.65	15	.108		
16.00	2.65	15	.108		
18.00	2.65	15	.135		
20.00	2.65	15	.135		
22.40	2.65	15	.119		
25.00	2.65	15	.159		
30.00	2.65	15	.186		
33.50	2.65	8	.235		
35.50	2.65	8	.234		
36.50	2.65	8	.263		
21.92	2.95	35	.046		

O-Rings - Buna-N

Ordering Information


Part Number: Prefix - ID X CS

Example: MOR - 3 X 1

Please specify 70 or 90 Durometer Buna-N Rubber when ordering.

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -40 to +220° F

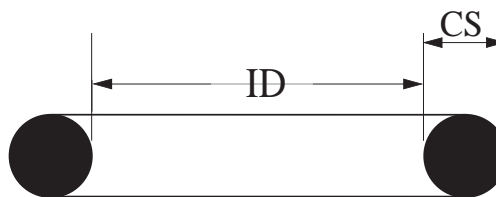

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
23.47	2.95	35	\$.052		
25.04	2.95	35	.057		
26.59	2.95	35	.066		
29.74	2.95	25	.077		
34.42	2.95	25	.088		
5.00	3.0	25	.074		
5.50	3.0	25	.074		
6.00	3.0	25	.074		
8.00	3.0	25	.081		
9.00	3.0	25	.087	25	\$.20
9.50	3.0	25	.18		
10.00	3.0	25	.18	25	.20
10.50	3.0	25	.10		
11.00	3.0	25	.10	25	.20
12.00	3.0	25	.10		
13.00	3.0	25	.114		
14.00	3.0	25	.119		
15.00	3.0	25	.119		
16.00	3.0	13	.14		
17.00	3.0	18	.14	7	.70
18.00	3.0	18	.14		
19.00	3.0	18	.141	7	.70
19.20	3.0	18	.141	8	.60
19.50	3.0	18	.141		
20.00	3.0	18	.166	8	.60
22.00	3.0	15	.34		
21.00	3.0	15	.166		
21.50	3.0	15	.166		
22.00	3.0	15	.166		
22.20	3.0	15	.166	7	.66
22.50	3.0	15	.166		
23.00	3.0	15	.166		
24.00	3.0	15	.166		
24.50	3.0	15	.166		
25.00	3.0	15	.166		
25.50	3.0	15	.167		
26.00	3.0	12	.199		
26.20	3.0	12	.199	6	.78
26.50	3.0	12	.199		

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
27.00	3.0	12	\$.20	6	\$.78
27.50	3.0	12	.20		
28.00	3.0	10	.20		
29.00	3.0	10	.20		
29.20	3.0	10	.20		
29.50	3.0	10	.20		
30.00	3.0	10	.20		
31.00	3.0	10	.248		
31.50	3.0	10	.248		
32.00	3.0	10	.248		
32.20	3.0	10	.249		
32.50	3.0	10	.249		
33.00	3.0	10	.249		
34.00	3.0	10	.249		
34.20	3.0	10	.249		
34.50	3.0	10	.249		
35.00	3.0	10	.249		
35.50	3.0	10	.276		
36.00	3.0	10	.276		
36.20	3.0	10	.276		
36.50	3.0	10	.276		
37.00	3.0	12	.276		
37.47	3.0	20	.097		
37.50	3.0	5	.276		
38.00	3.0	10	.276		
38.50	3.0	10	.276		
39.20	3.0	5	.277		
39.50	3.0	5	.277		
41.00	3.0	5	.317		
41.50	3.0	5	.317		
42.00	3.0	5	.317		
42.20	3.0	13	.317	3	1.86
42.50	3.0	7	.317		
43.00	3.0	7	.317		
43.69	3.0	7	.11		
44.00	3.0	7	.317		
44.20	3.0	7	.317		
44.50	3.0	7	.317		
45.00	3.0	7	.318	3	1.86
46.00	3.0	5	.358		

O-Rings - Buna-N

Ordering Information


Part Number: Prefix - ID X CS

Example: MOR - 3 X 1

Please specify 70 or 90 Durometer Buna-N Rubber when ordering.

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -40 to +220° F

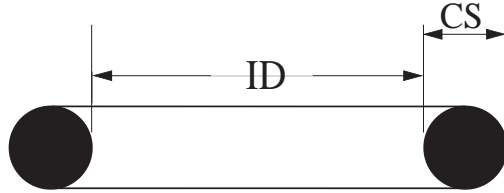

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
47.00	3.0	5	\$.358		
48.00	3.0	7	.359		
49.00	3.0	7	.359		
49.50	3.0	7	.359		
51.00	3.0	7	.359		
52.00	3.0	8	.384		
53.09	3.0	8	.154		
54.00	3.0	5	.405		
54.50	3.0	5	.405		
55.00	3.0	5	.405		
56.00	3.0	5	.411	1	\$ 3.39
57.00	3.0	6	.74		
58.00	3.0	5	.411		
59.00	3.0	5	.411		
59.36	3.0	10	.16		
59.50	3.0	5	.411		
60.00	3.0	7	.411	2	1.15
62.00	3.0	9	.491		
64.00	3.0	5	.491		
64.50	3.0	5	.491		
65.00	3.0	7	.491		
66.00	3.0	6	.544		
67.00	3.0	6	.544		
68.00	3.0	6	.77		
69.00	3.0	6	.544		
70.00	3.0	6	.544		
72.00	3.0	4	.596		
74.00	3.0	4	.596		
74.50	3.0	4	.596		
75.00	3.0	4	.597		
76.00	3.0	4	.636		
77.00	3.0	4	.98		
78.00	3.0	4	.636		
79.00	3.0	4	.637		
79.50	3.0	4	.637		
80.00	3.0	4	.638		
82.00	3.0	4	.677		
84.00	3.0	4	.677		
84.50	3.0	4	.677		
85.00	3.0	3	.677		

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
86.00	3.0	3	\$.716		
88.00	3.0	3	.716		
89.00	3.0	3	.716		
89.50	3.0	3	.717		
90.00	3.0	3	.717		
92.00	3.0	3	.809		
94.30	3.0			2	\$ 1.52
94.50	3.0	3	.809		
95.00	3.0	3	1.60		
96.00	3.0	3	.81		
97.00	3.0	3	1.34		
98.00	3.0	3	.81		
99.00	3.0	3	.81		
99.50	3.0	4	.811		
100.00	3.0	3	.811		
104.50	3.0	3	.824		
106.00	3.0	3	.825		
108.00	3.0	3	.825		
109.50	3.0	3	.825		
110.00	3.0	3	.826		
114.50	3.0	2	.915		
115.00	3.0	2	.915		
118.00	3.0	2	.916		
119.50	3.0	2	.916		
120.00	3.0	2	.916		
123.00	3.0	2	.917		
124.50	3.0	2	1.032		
127.00	3.0	2	1.033		
128.00	3.0	2	1.033		
129.50	3.0	2	1.033		
130.00	3.0	2	1.034		
132.00	3.0	2	1.034		
135.00	3.0	2	1.20		
136.00	3.0	2	1.20		
137.00	3.0	2	1.201		
140.00	3.0	2	1.202		
146.00	3.0	2	1.202		
149.00	3.0	2	1.203		
149.50	3.0	2	1.203		
150.00	3.0	1	1.334		

O-Rings - Buna-N

Ordering Information


Part Number: Prefix - ID X CS

Example: MOR - 3 X 1

Please specify 70 or 90 Durometer Buna-N Rubber when ordering.

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -40 to +220° F

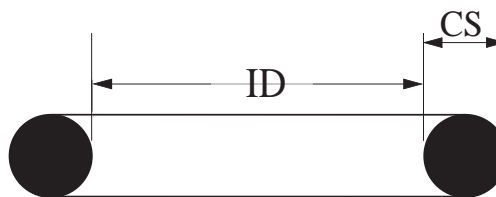

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
155.00	3.0	1	\$ 1.527		
156.00	3.0	1	1.527		
160.00	3.0	1	1.527		
168.00	3.0	1	1.528		
170.00	3.0	1	1.68		
171.00	3.0	1	1.68		
174.00	3.0	1	2.104		
175.00	3.0	1	2.10		
176.00	3.0	1	2.104		
177.00	3.0	1	2.104		
180.00	3.0	1	2.105		
189.00	3.0	1	2.105		
189.50	3.0	1	2.105		
194.00	3.0	1	2.105		
205.00	3.0	1	2.105		
209.00	3.0	1	2.105		
215.00	3.0	2	3.90	2	\$ 3.90
225.00	3.0	1	2.105		
237.00	3.0	1	2.105		
240.00	3.0	1	4.60		
250.00	3.0	1	4.806		
260.00	3.0	1	5.30		
24.40	3.1	15	.248	12	.38
29.40	3.1	15	.488	12	.732
32.00	3.1	3	1.33		
34.40	3.1	12	.599	10	.899
39.40	3.1	10	.75	10	.96
44.40	3.1	10	.866	10	1.299
49.40	3.1	10	1.154	8	1.732
54.40	3.1	7	1.301	6	1.952
57.40	3.1	6	.74		
59.40	3.1	6	1.448	5	2.172
62.40	3.1			1	2.46
64.40	3.1	5	1.737	5	.96
69.40	3.1	5	2.026	5	3.039
74.40	3.1	5	2.168	4	3.252
79.40	3.1	5	2.19	4	3.286
84.40	3.1	4	2.288	3	3.839
89.40	3.1	4	2.559	3	1.44
94.40	3.1	4	2.692	3	4.039

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
99.40	3.1	4	\$ 2.826	3	\$ 4.239
104.40	3.1	3	2.941	3	4.412
109.40	3.1	3	3.23	3	1.76
114.40	3.1	3	3.368	3	1.82
119.40	3.1	3	3.372	3	1.90
124.40	3.1	3	3.501	3	1.94
129.40	3.1	3	3.759	2	1.98
134.40	3.1	3	3.892	2	2.06
139.40	3.1	3	4.021	2	2.20
144.40	3.1	2	4.408	2	2.32
149.40	3.1	2	2.24	2	2.32
21.70	3.5	18	.26	15	.30
8.00	3.5	18	.09		
14.00	3.5	10	.143		
15.00	3.5	10	.143		
16.00	3.5	10	.173		
21.00	3.5	10	.192		
21.70	3.5	10	.419		
22.00	3.5	10	.192		
22.10	3.5	18	.419	15	.921
23.70	3.5	18	.452	15	.987
24.70	3.5	16	.452	15	1.02
25.00	3.5	16	.192		
25.20	3.5	16	.488	15	1.02
25.70	3.5	16	.523	15	.34
27.70	3.5	15	.523	12	.38
28.00	3.5	15	.262		
28.70	3.5	15	.559	12	1.152
29.00	3.5	15	.262		
29.20	3.5	15	.559	12	.40
29.70	3.5	15	.594	12	1.184
30.00	3.5	15	.263		
30.70	3.5	12	.674	10	1.25
31.20	3.5	12	.688	10	.44
31.70	3.5	10	.71	10	1.316
33.70	3.5	10	.75	10	1.382
34.00	3.5	10	.304		
34.70	3.5	10	.759	10	1.415
35.20	3.5	10	.794	10	.48
35.70	3.5	10	.866	10	.48

O-Rings - Buna-N

Ordering Information


Part Number: Prefix - ID X CS

Example: MOR - 3 X 1

Please specify 70 or 90 Durometer Buna-N Rubber when ordering.

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -40 to +220° F

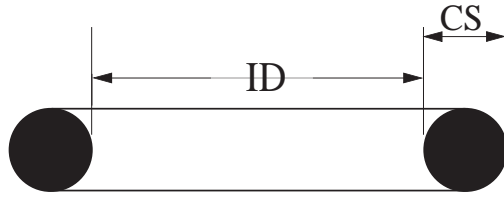

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
37.00	3.5	10	\$.304		
37.70	3.5	10	.941	10	\$ 1.448
38.00	3.5	10	.359		
38.70	3.5	10	.977	10	1.448
39.70	3.5	10	1.012	10	1.486
40.70	3.5	10	1.012	10	1.519
41.70	3.5	10	1.048	10	1.572
42.00	3.5	10	.373		
43.70	3.5	10	1.083	10	1.626
44.70	3.5	10	1.11	7	1.666
45.70	3.5	10	1.159	7	.62
47.70	3.5	10	1.23	7	1.846
48.00	3.5	10	.373		
48.70	3.5	7	1.697	7	.68
49.70	3.5	7	1.723	6	2.586
50.00	3.5	5	.428		
52.00	3.5	5	.451		
56.00	3.5	5	.451		
58.00	3.5	5	.504		
59.00	3.5			1	1.55
60.00	3.5	5	.504		
61.00	3.5	5	.505		
63.00	3.5	5	.585		
65.00	3.5	5	.583		
69.00	3.5	5	.584		
71.00	3.5	5	.584		
73.00	3.5	5	.743		
77.00	3.5	5	.743		
80.00	3.5	5	.783		
86.00	3.5	6	.783	6	0.74
93.00	3.5	5	.783		
105.00	3.5	5	.784		
112.00	3.5	5	.784		
118.00	3.5	5	.784		
120.00	3.5	2	1.082		
129.00	3.5	2	1.082		
132.00	3.5	2	1.085		
145.00	3.5	2	1.337		
147.00	3.5	2	1.337		
153.00	3.5	2	1.565		

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
168.00	3.5	2	\$ 1.792		
170.00	3.5	2	1.792		
175.00	3.5	2	1.883		
180.00	3.5	1	2.119		
193.00	3.5	1	2.496		
200.00	3.5	1	2.543		
202.00	3.5	1	2.614		
210.00	3.5	1	3.354		
211.00	3.5	1	3.367		
282.00	3.5	1	5.083		
4.34	3.53	50	.021		
5.94	3.53	50	.023		
7.52	3.53	50	.026		
9.12	3.53	50	.026		
10.69	3.53	50	.026		
12.29	3.53	50	.03		
13.87	3.53	50	.03		
15.47	3.53	50	.038		
17.04	3.53	50	.043		
18.64	3.53	50	.043		
20.22	3.53	35	.046		
21.82	3.53	35	.048		
23.39	3.53	35	.048		
24.99	3.53	35	.05		
26.57	3.53	35	.059		
28.17	3.53	35	.063		
29.74	3.53	35	.066		
31.34	3.53	35	.066		
32.92	3.53	35	.066		
34.52	3.53	25	.07		
36.09	3.53	25	.082		
37.69	3.53	20	.088		
40.87	3.53	20	.099		
44.04	3.53	20	.106		
47.22	3.53	20	.114		
50.39	3.53	20	.132		
53.57	3.53	20	.132		
56.74	3.53	20	.143		
58.70	3.53	4	.85		
59.92	3.53	10	.154		

O-Rings - Buna-N

Ordering Information


Part Number: Prefix - ID X CS

Example: MOR - 3 X 1

Please specify 70 or 90 Durometer Buna-N Rubber when ordering.

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -40 to +220° F

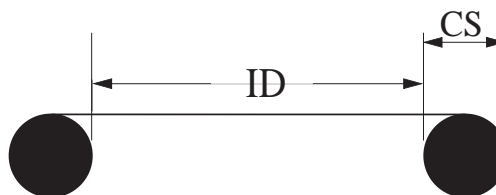

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
63.09	3.53	10	\$.166		
65.10	3.53	5	.86		
66.27	3.53	5	.177		
68.26	3.53	3	1.56		
69.44	3.53	10	.177		
72.62	3.53	10	.188		
75.79	3.53	10	.201		
78.97	3.53	10	.21		
82.14	3.53	8	.221		
85.32	3.53	8	.221		
88.49	3.53	8	.232		
91.67	3.53	8	.232		
94.84	3.53	8	.243		
98.02	3.53	8	.248		
101.19	3.53	8	.266		
104.37	3.53	8	.288		
107.54	3.53	8	.299		
110.72	3.53	5	.332		
113.89	3.53	5	.377		
117.07	3.53	5	.388		
120.24	3.53	5	.399		
123.42	3.53	5	.421		
126.59	3.53	5	.421		
129.77	3.53	3	.443		
132.94	3.53	3	.443		
136.12	3.53	3	.466		
139.29	3.53	3	.51		
142.47	3.53	3	.532		
145.64	3.53	3	.554		
148.82	3.53	3	.577		
151.99	3.53	3	.599		
158.34	3.53	3	.666		
164.69	3.53	3	.666		
171.04	3.53	3	.71		
177.39	3.53	3	.732		
183.74	3.53	3	.799		
190.09	3.53	3	.821		
196.44	3.53	3	.888		
202.79	3.53	2	.91		
209.14	3.53	2	.932		

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
215.49	3.53	2	\$ 1.021		
221.84	3.53	2	1.11		
228.19	3.53	2	1.11		
234.54	3.53	2	1.11		
240.89	3.53	2	1.11		
247.24	3.53	2	1.11		
253.59	3.53	2	1.11		
266.29	3.53	2	1.221		
278.99	3.53	2	1.332		
291.69	3.53	2	1.332		
304.39	3.53	2	1.443		
329.79	3.53	1	1.777		
355.19	3.53	1	2.177		
380.59	3.53	1	2.554		
405.26	3.53	1	2.777		
430.66	3.53	1	3.11		
456.06	3.53	1	3.554		
18.00	3.55	10	.174		
25.00	3.55	10	.194		
30.00	3.55	8	.263		
34.50	3.55	5	.305		
40.00	3.55	5	.36		
45.00	3.55	5	.374		
53.00	3.55	5	.423		
60.00	3.55	3	.504		
75.00	3.55	3	.745		
85.00	3.55	3	.776		
95.00	3.55	2	.984		
106.00	3.55	2	.988		
118.00	3.55	2	1.00		
140.00	3.55	2	1.204		
170.00	3.55	1	1.766		
9.00	4.0	20	.101		
10.00	4.0	20	.125		
11.00	4.0	20	.125		
12.00	4.0	20	.125		
14.00	4.0	6	.154		
15.00	4.0	12	.156		
16.00	4.0	12	.198		
17.00	4.0	12	.198		

O-Rings - Buna-N

Ordering Information


Part Number: Prefix - ID X CS

Example: MOR - 3 X 1

Please specify 70 or 90 Durometer Buna-N Rubber when ordering.

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -40 to +220° F

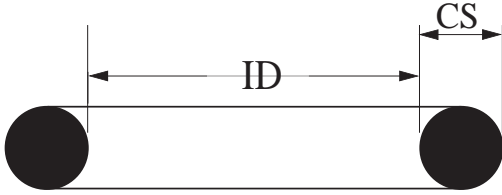

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
18.00	4.0	12	\$.198		
19.00	4.0	12	.198		
20.00	4.0	12	.198		
21.00	4.0	5	.22		
22.00	4.0	5	.22		
23.00	4.0	5	.22		
23.50	4.0	5	.92		
24.00	4.0	5	.221		
25.00	4.0	5	.222		
27.00	4.0	6	.304		
28.00	4.0	6	.305		
29.00	4.0	6	.305		
30.00	4.0	6	.305		
31.00	4.0	10	.35		
32.00	4.0	6	.331		
33.00	4.0	6	.331		
34.00	4.0	6	.332		
35.00	4.0	6	.332		
37.00	4.0	6	.374		
38.00	4.0	5	.374		
40.00	4.0	5	.374		
41.00	4.0	4	.374		
42.00	4.0	4	.415		
43.00	4.0	4	.415		
44.00	4.0	4	.416		
45.00	4.0	4	.416		
47.00	4.0	1	.455		
48.00	4.0	6	.456		
49.00	4.0	4	.456		
50.00	4.0	4	.456		
51.00	4.0	4	.47		
52.00	4.0	7	.478		
54.00	4.0	4	.478		
55.00	4.0	4	.478		
56.00	4.0	4	.531		
57.00	4.0	4	.531		
58.00	4.0	4	.531		
59.00	4.0	4	.531		
60.00	4.0	4	.531		
62.0	4.0	2	1.09		

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
63.00	4.0	3	\$.583		
64.00	4.0	3	.583		
65.00	4.0	3	.583		
66.00	4.0	4	.71		
67.00	4.0	3	.71		
68.00	4.0	3	.712		
69.00	4.0	3	.712		
70.00	4.0	3	.712		
71.00	4.0	3	.713		
72.00	4.0	2	1.30		
73.00	4.0	2	.714		
75.00	4.0	2	.743		
76.00	4.0	2	.783		
78.00	4.0	2	.783		
79.00	4.0	2	.783		
80.00	4.0	2	.783		
81.00	4.0	2	.788		
82.00	4.0	2	.798		
84.00	4.0	2	.799		
86.00	4.0	2	.812		
89.00	4.0	3	.818		
90.00	4.0	2	.823		
91.00	4.0	2	.918		
92.00	4.0	2	.983		
95.00	4.0	2	.983		
96.00	4.0	2	.984		
98.00	4.0	2	.984		
99.00	4.0	2	.984		
100.00	4.0	2	.984		
102.00	4.0	2	1.044		
104.00	4.0	2	1.044		
105.00	4.0	2	1.044		
108.00	4.0	2	1.044		
110.00	4.0	2	1.045		
111.00	4.0	2	1.059		
112.00	4.0	2	1.082		
114.00	4.0	2	1.082		
115.00	4.0	2	1.084		
116.00	4.0	3	1.70		
117.00	4.0	1	1.084		

O-Rings - Buna-N

Ordering Information


Part Number: Prefix - ID X CS

Example: MOR - 3 X 1

Please specify 70 or 90 Durometer Buna-N Rubber when ordering.

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -40 to +220° F

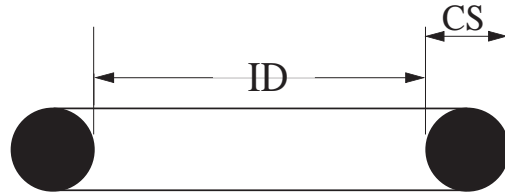

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
118.00	4.0	2	\$ 1.084		
119.00	4.0	3	1.084		
120.00	4.0	2	1.084		
121.00	4.0	2	1.106		
124.00	4.0	2	1.122		
126.00	4.0	2	1.122		
127.00	4.0	2	1.122		
128.00	4.0	2	1.123		
129.00	4.0	2	1.123		
130.00	4.0	2	1.123		
132.00	4.0	3	2.00		
133.00	4.0	2	1.141		
134.00	4.0	2	2.06		
136.00	4.0	1	1.141		
137.00	4.0	2	1.141		
140.00	4.0	2	1.20		
142.00	4.0	2	1.334		
146.00	4.0	2	1.334		
150.00	4.0	2	1.334		
152.00	4.0	2	1.411		
155.00	4.0	2	1.564		
158.00	4.0	2	1.564		
160.00	4.0	2	1.564		
164.00	4.0	2	1.81		
165.00	4.0	2	1.812		
170.00	4.0	2	3.50		
171.00	4.0	2	2.091		
172.00	4.0	2	2.095		
173.00	4.0	2	2.107		
174.00	4.0	2	2.107		
177.00	4.0	2	2.116		
180.00	4.0	2	2.145		
195.00	4.0	2	2.614		
200.00	4.0	2	2.628		
215.00	4.0	2	3.769		
240.00	4.0	1	4.50		
242.00	4.0	1	4.522		
249.00	4.0	1	4.593		
250.00	4.0	1	4.616		
265.00	4.0	1	4.866		

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
266.00	4.0	1	\$ 5.155		
270.00	4.0	1	5.266		
285.00	4.0	1	5.553		
287.00	4.0	1	13.83		
300.00	4.0	1	5.669		
314.00	4.0	1	5.864		
438.00	4.0	1	10.50		
15.00	5.0	20	.195		
16.00	5.0	16	.236		
19.00	5.0	16	.236		
20.00	5.0	16	.236		
21.00	5.0	16	.237		
22.00	5.0	16	.29		
24.00	5.0	16	.29		
27.00	5.0	10	.373		
28.00	5.0	10	.373		
30.00	5.0	10	.373		
31.00	5.0	10	.376		
32.00	5.0	10	.441		
35.00	5.0	10	.442		
38.00	5.0	10	.455		
39.00	5.0	10	.455		
40.00	5.0	10	.455		
42.00	5.0	10	.483		
44.00	5.0	10	.483		
45.00	5.0	10	.484		
50.00	5.0	6	.567		
52.00	5.0	6	.568		
55.00	5.0	6	.583		
58.00	5.0	6	.583		
60.00	5.0	6	.702		
61.00	5.0	6	.743		
63.00	5.0	6	.796		
65.00	5.0	6	.823		
68.00	5.0	6	.85		
70.00	5.0	7	.85		
73.00	5.0	6	.874		
75.00	5.0	3	1.50		
76.00	5.0	6	.89		
78.00	5.0	2	.894		

O-Rings - Buna-N

Ordering Information


Part Number: Prefix - ID X CS

Example: MOR - 3 X 1

Please specify 70 or 90 Durometer Buna-N Rubber when ordering.

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -40 to +220° F

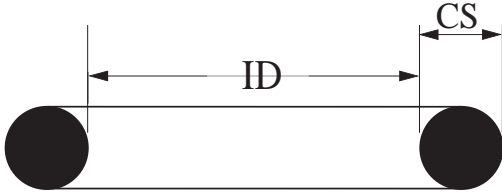

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
80.00	5.0	2	\$.902		
82.00	5.0	2	.927		
84.00	5.0	2	.927		
85.00	5.0	2	.931		
90.00	5.0	2	.956		
92.00	5.0	2	1.064		
95.00	5.0	2	1.169		
97.00	5.0	2	1.17		
100.00	5.0	2	1.17		
102.00	5.0	2	1.196		
105.00	5.0	2	1.235		
107.00	5.0	2	1.236		
108.00	5.0	2	1.237		
110.00	5.0	2	1.237		
112.00	5.0	2	1.252		
116.00	5.0	2	1.294		
118.00	5.0	2	1.322		
120.00	5.0	2	1.353		
121.00	5.0	2	1.373		
122.00	5.0	2	1.40		
125.00	5.0	2	1.416		
126.00	5.0	2	1.417		
128.00	5.0	2	1.418		
130.00	5.0	2	1.419		
135.00	5.0	2	1.482		
138.00	5.0	2	1.483		
140.00	5.0	2	1.483		
143.00	5.0	2	1.526		
144.00	5.0	2	1.543		
148.00	5.0	2	1.556		
150.00	5.0	2	1.572		
155.00	5.0	2	1.914		
158.00	5.0	2	1.914		
160.00	5.0	2	1.914		
165.00	5.0	2	2.096		
167.00	5.0	2	2.334		
170.00	5.0	2	5.51		
171.00	5.0	2	2.386		
173.00	5.0	2	2.50		
175.00	5.0	1	2.578		

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
177.00	5.0	1	\$ 2.578		
180.00	5.0	1	2.578		
182.00	5.0	1	2.681		
188.00	5.0	1	2.788		
195.00	5.0	1	2.84		
200.00	5.0	1	2.944		
205.00	5.0	1	3.441		
210.00	5.0	1	3.837		
216.00	5.0	1	4.008		
220.00	5.0	1	4.143		
222.00	5.0	1	4.358		
225.00	5.0	1	4.374		
229.00	5.0	1	4.379		
235.00	5.0	1	4.592		
236.00	5.0	1	4.592		
240.00	5.0	1	4.691		
245.00	5.0	1	4.73		
250.00	5.0	1	4.828		
255.00	5.0	1	4.926		
265.00	5.0	1	5.166		
275.00	5.0	1	5.544		
285.00	5.0	1	5.809		
290.00	5.0	1	6.15		
300.00	5.0	1	6.219		
330.00	5.0	1	6.276		
338.00	5.0	1	6.621		
345.00	5.0	1	6.92		
350.00	5.0	1	7.708		
375.00	5.0	1	7.995		
395.00	5.0	1	8.477		
40.00	5.3	10	.458		
45.00	5.3	10	.486		
50.00	5.3	10	.569		
56.00	5.3	8	.71		
63.00	5.3	4	.984		
71.00	5.3	4	.984		
80.00	5.3	4	1.05		
90.00	5.3	4	1.059		
100.00	5.3	4	1.172		
112.00	5.3	30	1.341		

O-Rings - Buna-N

Ordering Information


Part Number: Prefix - ID X CS

Example: MOR - 3 X 1

Please specify 70 or 90 Durometer Buna-N Rubber when ordering.

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -40 to +220° F

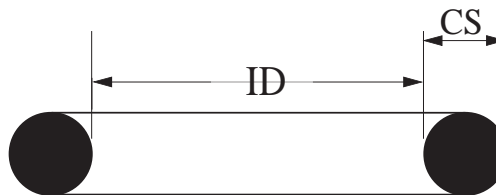

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
125.00	5.3	30	\$ 1.423		
140.00	5.3	30	1.486		
150.00	5.3	30	1.582		
170.00	5.3	20	2.102		
190.00	5.3	20	2.923		
10.46	5.33	50	.054		
12.07	5.33	50	.06		
13.64	5.33	50	.06		
15.24	5.33	50	.071		
16.81	5.33	50	.074		
18.42	5.33	50	.074		
19.99	5.33	50	.077		
21.59	5.33	50	.083		
23.16	5.33	50	.083		
24.77	5.33	50	.083		
26.34	5.33	35	.093		
27.94	5.33	35	.099		
29.51	5.33	35	.099		
31.12	5.33	35	.099		
32.69	5.33	35	.099		
34.29	5.33	35	.099		
37.47	5.33	35	.11		
40.64	5.33	35	.11		
43.82	5.33	25	.142		
46.99	5.33	25	.154		
50.17	5.33	25	.166		
53.34	5.33	20	.188		
56.52	5.33	20	.203		
59.69	5.33	20	.221		
62.87	5.33	15	.243		
66.04	5.33	15	.248		
69.22	5.33	15	.266		
72.39	5.33	15	.288		
75.57	5.33	15	.299		
78.74	5.33	15	.299		
81.92	5.33	10	.332		
85.09	5.33	10	.354		
88.27	5.33	10	.354		
91.44	5.33	10	.388		
94.62	5.33	10	.399		

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
97.79	5.33	10	\$.399		
100.97	5.33	10	.443		
104.14	5.33	10	.443		
107.32	5.33	10	.443		
110.49	5.33	10	.443		
113.67	5.33	8	.488		
116.84	5.33	8	.51		
120.02	5.33	8	.51		
123.19	5.33	8	.532		
126.37	5.33	8	.554		
129.54	5.33	8	.599		
132.72	5.33	5	.666		
135.89	5.33	5	.666		
139.07	5.33	5	.688		
142.24	5.33	5	.732		
145.42	5.33	5	.732		
148.59	5.33	5	.777		
151.77	5.33	5	.799		
158.12	5.33	5	.777		
164.47	5.33	5	.854		
170.82	5.33	5	.888		
177.17	5.33	5	.932		
183.52	5.33	5	.932		
189.87	5.33	5	.999		
196.22	5.33	5	.999		
202.57	5.33	3	1.043		
208.92	5.33	3	1.154		
215.27	5.33	3	1.199		
221.62	5.33	3	1.221		
227.97	5.33	3	1.332		
234.32	5.33	3	1.354		
240.67	5.33	3	1.377		
247.02	5.33	3	1.399		
253.37	5.33	3	1.399		
266.07	5.33	3	1.777		
278.77	5.33	2	1.888		
291.47	5.33	2	1.932		
291.69	5.33	1	5.586		
304.17	5.33	2	1.999		
329.57	5.33	2	1.999		

O-Rings - Buna-N

Ordering Information


Part Number: Prefix - ID X CS

Example: MOR - 3 X 1

Please specify 70 or 90 Durometer Buna-N Rubber when ordering.

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -40 to +220° F

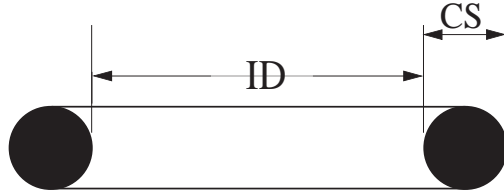

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
354.97	5.33	1	\$ 2.666		
380.37	5.33	1	2.666		
405.26	5.33	1	3.11		
430.66	5.33	1	3.332		
456.06	5.33	1	3.777		
481.46	5.33	1	3.888		
491.49	5.33	1	12.537		
506.86	5.33	1	3.888		
532.26	5.33	1	3.999		
557.66	5.33	1	6.443		
582.68	5.33	1	7.11		
608.08	5.33	1	7.554		
633.48	5.33	1	8.443		
658.88	5.33	1	8.888		
44.30	5.7	8	.541		
45.30	5.7	6	.624		
47.60	5.7	6	1.674	6	\$ 3.599
49.30	5.7	6	.624		
49.60	5.7	6	1.746	5	3.599
51.60	5.7	5	1.817	5	3.839
52.30	5.7	5	.65		
52.60	5.7	5	1.954	5	3.839
54.30	5.7	5	.65		
54.60	5.7	5	2.092	4	4.079
55.30	5.7	5	.77		
55.60	5.7	5	2.154	4	1.14
57.60	5.7	5	2.288	4	4.559
59.20	5.7	3	1.42		
59.30	5.7	5	.771		
59.60	5.7	5	2.421	4	4.559
61.60	5.7	4	2.492	4	5.039
62.30	5.7	4	.903		
62.60	5.7	4	2.559	4	5.039
64.30	5.7	4	.903		
64.60	5.7	4	2.626	3	5.519
66.60	5.7	4	2.692	3	1.40
67.60	5.7	4	2.732		
68.60	5.7	4		3	5.519
69.60	5.7	4	2.759	3	5.999
70.60	5.7	4	2.826	3	5.999

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
74.30	5.7	4	\$.983		
74.60	5.7	3	2.897	3	\$ 5.999
79.30	5.7	3	1.051		
79.60	5.7	3	3.03	3	7.199
84.30	5.7	3	1.103		
84.60	5.7	3	2.563	3	7.199
89.30	5.7	3	1.17		
89.60	5.7	3	3.368	3	8.159
94.30	5.7	3	1.37		
94.60	5.7	3	3.372	3	1.78
99.30	5.7	3	1.37		
99.60	5.7	3	2.368	3	1.78
101.60	5.7	3	3.759	3	8.207
104.30	5.7	3	1.407		
104.60	5.7	3	3.759	2	2.20
109.30	5.7	3	1.408		
109.60	5.7	3	3.888	2	9.059
111.60	5.7	3	4.208	2	9.059
114.60	5.7	2	4.408	2	2.64
119.60	5.7	2	4.532	2	9.935
124.30	5.7	2	1.626		
124.60	5.7	2	4.577	2	9.935
129.30	5.7	2	1.626		
129.60	5.7	2	4.621	2	10.799
131.60	5.7	2	4.754	2	10.799
134.30	5.7	2	1.756		
134.60	5.7	2	4.843	2	3.40
139.30	5.7	2	1.756		
139.60	5.7	2	4.977	2	\$3.53
144.30	5.7	2	1.833		
144.60	5.7	2	5.243	2	3.60
149.30	5.7	2	2.537	1	14.788
149.60	5.7	2	5.599	1	11.663
154.30	5.7	2	2.666	1	15.599
159.30	5.7	2	2.888	1	3.96
164.30	5.7	2	3.11	1	16.847
169.30	5.7	2	3.338	1	17.471
174.30	5.7	1	3.554	1	18.407
179.30	5.7	1	3.777	1	19.031
184.30	5.7	1	3.999	1	19.967

O-Rings - Buna-N

Ordering Information


Part Number: Prefix - ID X CS

Example: MOR - 3 X 1

Please specify 70 or 90 Durometer Buna-N Rubber when ordering.

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -40 to +220° F

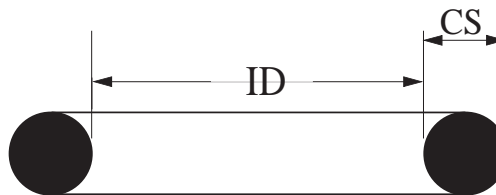

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
189.30	5.7	1	\$ 3.999	1	\$20.591
194.30	5.7	1	4.221	1	4.96
199.30	5.7	1	4.407	1	21.839
204.30	5.7	1		1	5.36
209.30	5.7	1	4.81	1	23.399
214.30	5.7	1	4.74	1	5.62
219.30	5.7	1	5.074	1	24.959
224.30	5.7	1	5.00	1	5.74
229.30	5.7	1	5.21	1	27.455
234.30	5.7	1	5.24	1	6.00
239.30	5.7	1	5.342	1	6.00
249.30	5.7	1	6.46	1	6.46
254.30	5.7	1	5.70	1	6.60
259.30	5.7	1	5.742	1	30.575
269.30	5.7	1	5.877	1	32.447
274.30	5.7	1	6.28	1	7.62
279.30	5.7	1	6.277	1	34.319
289.30	5.7	1	6.542	1	35.879
299.30	5.7	1	6.946	1	37.439
304.30	5.7	1	7.56	1	8.80
309.30	5.7	1	7.56		
344.30	5.7	1	8.50		
359.30	5.7	1	9.60		
399.30	5.7	1	11.54		
404.30	5.7	1	11.86		
424.30	5.7	1	12.10		
429.30	5.7	1	12.64		
434.30	5.7	1	12.64		
439.30	5.7	1	12.96		
444.30	5.7	1	12.96		
459.30	5.7	1	13.74		
464.30	5.7	1	13.74		
469.30	5.7	1	13.88		
474.30	5.7	1	14.04		
479.30	5.7	1	14.20		
484.30	5.7	1	14.20		
489.30	5.7	1	14.50		
494.30	5.7	1	14.50		
499.30	5.7	1	14.74		
20.00	6.0	10	.399		

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
25.00	6.0	10	\$.399		
30.00	6.0	10	.507		
37.00	6.0	5	.84		
46.00	6.0	3	1.78		
50.00	6.0	3	.622		
100.00	6.0	3	1.37		
114.00	6.0	3	1.61		
134.00	6.0	2	1.989		
160.00	6.0	2	2.179		
34.29	6.99	4	1.199		
37.46	6.99	4	1.199		
40.64	6.99	4	1.288		
43.81	6.99	4	1.288		
46.99	6.99	2	1.399		
50.16	6.99	2	1.399		
53.34	6.99	2	1.488		
56.51	6.99	2	1.488		
59.69	6.99	2	1.621		
62.86	6.99	2	1.621		
66.04	6.99	2	1.777		
69.21	6.99	2	1.777		
72.39	6.99	2	1.932		
75.56	6.99	2	1.932		
78.74	6.99	2	2.066		
81.91	6.99	2	2.066		
85.09	6.99	2	2.221		
88.26	6.99	2	2.221		
91.44	6.99	2	2.354		
94.61	6.99	2	2.354		
97.79	6.99	1	2.532		
100.96	6.99	1	2.532		
104.14	6.99	1	2.621		
107.31	6.99	1	2.621		
110.49	6.99	1	2.71		
113.67	6.99	10	.554		
116.84	6.99	10	.554		
120.02	6.99	10	.554		
123.19	6.99	8	.599		
126.37	6.99	8	.621		
129.54	6.99	6	.621		

O-Rings - Buna-N

Ordering Information


Part Number: Prefix - ID X CS

Example: MOR - 3 X 1

Please specify 70 or 90 Durometer Buna-N Rubber when ordering.

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -40 to +220° F

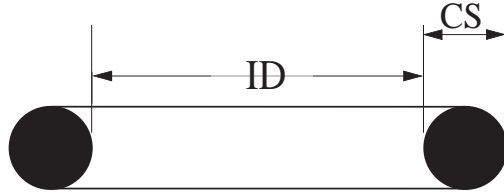

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
132.72	6.99	6	\$.71		
135.89	6.99	6	.721		
139.07	6.99	6	.721		
142.24	6.99	6	.732		
145.42	6.99	6	.777		
148.59	6.99	6	.777		
151.77	6.99	4	.843		
158.12	6.99	4	.888		
164.47	6.99	4	.932		
170.82	6.99	4	.999		
177.17	6.99	4	1.088		
183.52	6.99	4	1.11		
189.87	6.99	4	1.154		
196.22	6.99	4	1.221		
202.57	6.99	3	1.266		
215.27	6.99	3	1.31		
227.97	6.99	3	1.377		
240.67	6.99	3	1.377		
253.37	6.99	3	1.377		
266.07	6.99	2	1.666		
278.77	6.99	2	1.732		
291.47	6.99	2	1.888		
304.17	6.99	2	1.999		
316.87	6.99	2	2.11		
329.57	6.99	2	2.666		
342.27	6.99	2	2.666		
354.97	6.99	2	2.666		
367.67	6.99	2	2.666		
380.37	6.99	1	2.754		
393.07	6.99	1	2.888		
405.26	6.99	1	3.221		
417.96	6.99	1	3.332		
430.66	6.99	1	3.554		
443.36	6.99	1	3.777		
456.06	6.99	1	4.221		
468.76	6.99	1	4.221		
481.46	6.99	1	4.221		
494.16	6.99	1	4.443		
506.86	6.99	1	4.443		
532.26	6.99	1	4.999		

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
557.66	6.99	1	\$ 4.999		
582.68	6.99	1	5.11		
608.08	6.99	1	7.11		
633.48	6.99	1	7.777		
658.88	6.99	1	8.443		
206.00	7.0	1	5.888		
236.00	7.0	1	6.783		
272.00	7.0	1	6.949		
325.00	7.0	1	8.302		
365.00	7.0	1	9.311		
425.00	7.0	1	10.833		
475.00	7.0	1	12.059		
144.10	8.4	2	5.42		
149.50	8.4	1	5.552	1	\$ 4.02
154.50	8.4	1	8.443	1	4.40
159.50	8.4	1	8.666	1	23.759
164.10	8.4	1	8.977		
164.50	8.4	1	9.288	1	23.759
169.50	8.4	1	9.599	1	25.919
174.50	8.4	1	9.866	1	25.919
179.50	8.4	1	10.177	1	26.999
184.50	8.4	1	10.488	1	6.60
189.50	8.4	1	10.754	1	28.079
194.50	8.4	1	11.066	1	6.78
199.50	8.4	1	11.377	1	6.96
204.50	8.4	1	11.688	1	31.319
208.50	8.4	1	11.688	1	7.32
209.50	8.4	1	11.999	1	7.50
214.50	8.4	1	12.443	1	7.68
219.50	8.4	1	12.577	1	7.86
224.50	8.4	1	12.888	1	8.04
229.50	8.4	1	13.154	1	36.719
234.50	8.4	1	13.466	1	37.799
239.50	8.4	1	14.088	1	38.879
244.50	8.4	1	14.354	1	41.039
249.50	8.4	1	14.666	1	43.199
254.50	8.4	1	14.977	1	45.359
259.50	8.4	1	15.243	1	47.519
264.50	8.4	1	15.554	1	49.679
269.50	8.4	1	16.177	1	51.839

O-Rings - Buna-N

Ordering Information


Part Number: Prefix - ID X CS

Example: MOR - 3 X 1

Please specify 70 or 90 Durometer Buna-N Rubber when ordering.

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -40 to +220° F

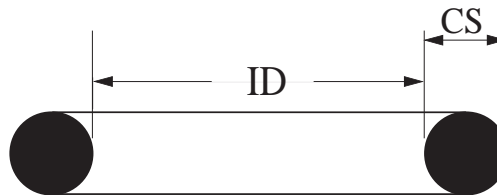

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
274.50	8.4	1	\$17.954	1	\$51.839
279.50	8.4	1	18.577	1	53.999
284.50	8.4	1	19.154	1	53.999
289.50	8.4	1	19.732	1	55.079
294.50	8.4	1	20.354	1	56.159
299.50	8.4	1	20.932	1	56.159
314.50	8.4	1	22.754	1	58.319
319.50	8.4	1	23.954	1	58.319
334.50	8.4	1	26.354	1	60.479
339.50	8.4	1	28.754	1	17.58

ID	C.S.	70 DURO		90 DURO	
		MP	LIST	MP	LIST
354.50	8.4	1	\$31.11	1	\$19.02
359.50	8.4	1	33.51	1	60.239
374.50	8.4	1	35.91	1	64.799
384.50	8.4	1	38.932	1	69.181
399.50	8.4	1	41.91	1	69.119



O-RING SPLICE KIT INCH & METRIC SIZES

Part Number: Met/Inch Splice Kit
List Price: \$51.11

This kit can produce O-Rings of any standard inch size cross-section plus a wide variety of metric sizes. Each kit contains quick drying adhesive, cutting and splicing jig, razor blade and 14 lengths of 70 Durometer Buna-N cord stock as follows:

Inch cross-sections: (inch)
1/16" (.070), 3/32" (.103), 1/8" (.139),
3/16" (.210), 1/4" (.275)
Metric cross-sections: (mm)
1.5, 2.0, 2.5, 3.0, 3.5, 4.0, 5.0, 5.7, 8.4

O-Ring Cord Stock

PART NUMBER	C.S.	LIST PRICE*
MORC-1.5	1.5	\$.50
MORC-2.0	2.0	.55
MORC-2.5	2.5	.66
MORC-3.0	3.0	.88
MORC-3.5	3.5	.90
MORC-4.0	4.0	.94
MORC-5.0	5.0	1.43
MORC-5.7	5.7	1.65
MORC-8.4	8.4	2.15

* Price per foot.

O-Rings - Fluorocarbon


Ordering Information

Part Number: Prefix - ID X CS

Example: MOR - 2 X 1V

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -20 to +400° F

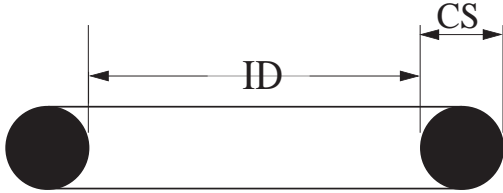

METRIC - O-RINGS

ID	C.S.	75 DURO		ID	C.S.	75 DURO		ID	C.S.	75 DURO	
		MP	LIST			MP	LIST			MP	LIST
2.0	1.0	25	\$.164	4.5	1.5	15	\$.243	30.0	1.5	4	\$.954
3.0	1.0	25	.193	5.0	1.5	15	.248	31.0	1.5	4	.977
3.5	1.0	25	.195	5.5	1.5	15	.266	32.0	1.5	4	.999
4.0	1.0	25	.208	6.0	1.5	15	.28	33.0	1.5	4	1.021
4.5	1.0	25	.221	6.5	1.5	15	.31	34.0	1.5	4	1.043
5.0	1.0	10	.232	7.0	1.5	10	.334	35.0	1.5	4	1.066
5.5	1.0	10	.243	7.5	1.5	10	.343	37.0	1.5	4	1.154
6.0	1.0	10	.252	8.5	1.5	10	.354	39.0	1.5	4	1.243
6.5	1.0	10	.277	9.0	1.5	10	.361	40.0	1.5	4	1.266
7.0	1.0	10	.299	9.5	1.5	10	.388	42.0	1.5	4	1.31
7.5	1.0	10	.31	10.0	1.5	10	.394	43.0	1.5	3	1.332
8.0	1.0	10	.317	10.5	1.5	10	.399	44.0	1.5	3	1.354
8.5	1.0	10	.332	11.0	1.5	10	.421	45.0	1.5	3	1.377
9.0	1.0	10	.332	11.5	1.5	10	.432	46.0	1.5	3	1.399
10.0	1.0	10	.354	12.0	1.5	10	.458	47.0	1.5	3	1.466
10.5	1.0	10	.366	12.5	1.5	8	.477	49.0	1.5	3	1.577
11.0	1.0	10	.386	13.0	1.5	8	.502	50.0	1.5	3	1.621
11.5	1.0	10	.398	13.5	1.5	8	.521	52.0	1.5	3	1.688
12.0	1.0	10	.413	14.0	1.5	8	.532	54.0	1.5	3	1.71
12.5	1.0	10	.432	14.5	1.5	8	.554	55.0	1.5	3	1.714
13.0	1.0	10	.466	15.0	1.5	8	.562	57.0	1.5	2	1.777
13.5	1.0	10	.477	15.5	1.5	8	.577	58.0	1.5	2	1.821
14.0	1.0	10	.491	16.0	1.5	8	.577	59.0	1.5	2	1.866
14.5	1.0	10	.499	17.0	1.5	8	.608	60.0	1.5	2	1.888
15.0	1.0	8	.51	17.5	1.5	8	.621	63.0	1.5	2	1.977
15.5	1.0	8	.521	18.0	1.5	6	.632	64.0	1.5	2	1.999
16.0	1.0	8	.526	19.0	1.5	6	.643	65.0	1.5	2	1.999
17.0	1.0	8	.554	19.5	1.5	6	.666	67.0	1.5	2	2.048
18.0	1.0	8	.577	20.0	1.5	6	.681	70.0	1.5	2	2.137
18.5	1.0	8	.588	21.5	1.5	6	.688	71.0	1.5	2	2.177
19.0	1.0	8	.599	22.0	1.5	6	.71	1.42	1.52	35	.097
19.5	1.0	8	.599	22.5	1.5	6	.71	2.75	1.6	15	.217
20.0	1.0	8	.612	23.0	1.5	6	.727	3.1	1.6	15	.226
0.74	1.02	35	.097	24.0	1.5	6	.732	3.7	1.6	15	.232
1.07	1.27	35	.097	25.0	1.5	6	.734	4.1	1.6	15	.237
4.7	1.42	35	.11	26.0	1.5	6	.777	4.7	1.6	15	.243
2.5	1.5	35	.188	27.5	1.5	6	.843	5.1	1.6	15	.258
3.0	1.5	15	.215	28.0	1.5	6	.866	6.1	1.6	15	.302
3.5	1.5	15	.232	28.5	1.5	5	.888	7.1	1.6	15	.34
4.0	1.5	15	.239	29.0	1.5	5	.91	8.1	1.6	15	.351

O-Rings - Fluorocarbon


Ordering Information

Part Number: Prefix - ID X CS

Example: MOR - 2 X 1V

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -20 to +400° F

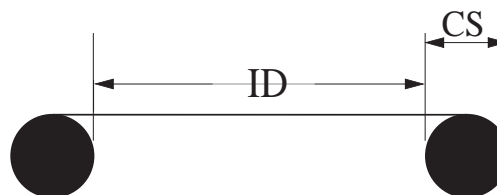

ID	C.S.	75 DURO		ID	C.S.	75 DURO		ID	C.S.	75 DURO	
		MP	LIST			MP	LIST			MP	LIST
9.1	1.6	10	\$.362	25.12	1.78	20	\$.197	5.8	1.9	10	\$.324
10.1	1.6	10	.399	26.7	1.78	20	.199	6.4	1.9	10	.31
11.1	1.6	10	.433	28.3	1.78	20	.243	6.8	1.9	10	.392
12.1	1.6	10	.466	29.87	1.78	20	.243	7.2	1.9	10	.354
13.1	1.6	10	.507	31.47	1.78	15	.266	7.8	1.9	10	.408
14.1	1.6	6	.545	33.05	1.78	15	.277	8.0	1.9	8	.377
15.1	1.6	6	.594	34.65	1.78	10	.31	8.8	1.9	8	.417
16.1	1.6	6	.615	37.82	1.78	10	.354	8.9	1.9	8	.388
17.1	1.6	6	.621	41.0	1.78	10	.366	9.8	1.9	8	.57
18.1	1.6	6	.643	44.17	1.78	10	.421	11.89	1.98	8	.157
19.1	1.6	6	.68	47.35	1.78	8	.488	2.5	2.0	10	.354
20.1	1.6	6	.666	50.52	1.78	8	.532	3.0	2.0	10	.357
21.1	1.6	6	.734	53.7	1.78	8	.532	3.5	2.0	10	.363
22.1	1.6	6	.734	56.87	1.78	8	.554	4.0	2.0	10	.37
25.1	1.6	6	.847	60.05	1.78	8	.621	4.5	2.0	10	.386
27.1	1.6	4	.888	63.22	1.78	6	.643	5.0	2.0	10	.394
29.1	1.6	4	.932	66.4	1.78	6	.666	5.5	2.0	10	.399
32.1	1.6	4	.977	69.57	1.78	6	.71	6.0	2.0	10	.408
35.1	1.6	4	.999	72.75	1.78	6	.732	6.5	2.0	10	.432
37.1	1.6	4	1.021	75.92	1.78	6	.843	7.0	2.0	10	.456
6.07	1.63	35	.117	82.27	1.78	6	.977	8.0	2.0	8	.484
7.65	1.63	35	.119	88.62	1.78	4	1.066	8.5	2.0	8	.488
1.78	1.78	35	.097	94.97	1.78	4	1.132	9.0	2.0	8	.498
2.57	1.78	35	.097	101.32	1.78	4	1.243	9.5	2.0	8	.51
2.9	1.78	35	.097	107.67	1.78	3	1.288	10.0	2.0	8	.518
3.68	1.78	35	.097	114.02	1.78	3	1.443	10.5	2.0	8	.532
4.47	1.78	35	.097	120.37	1.78	3	1.488	11.0	2.0	8	.543
5.28	1.78	35	.097	126.72	1.78	2	1.954	11.5	2.0	8	.577
6.07	1.78	35	.097	133.07	1.78	2	2.088	12.0	2.0	8	.593
7.65	1.78	35	.097	8.92	1.83	25	.134	12.5	2.0	8	.621
9.25	1.78	35	.11	10.52	1.83	25	.15	13.0	2.0	6	.63
10.82	1.78	35	.128	2.4	1.9	15	.221	13.5	2.0	6	.643
12.42	1.78	35	.128	2.6	1.9	15	.243	14.0	2.0	6	.666
14.0	1.78	35	.146	2.8	1.9	15	.266	14.5	2.0	6	.688
15.6	1.78	35	.146	3.4	1.9	15	.243	15.0	2.0	6	.694
17.17	1.78	25	.146	3.8	1.9	15	.268	16.0	2.0	6	.72
18.77	1.78	25	.154	4.2	1.9	15	.254	17.0	2.0	6	.742
20.35	1.78	25	.166	4.8	1.9	15	.283	17.5	2.0	6	.754
21.95	1.78	25	.177	4.9	1.9	15	.277	18.0	2.0	6	.774
23.52	1.78	25	.181	5.7	1.9	15	.288	18.5	2.0	6	.79

O-Rings - Fluorocarbon


Ordering Information

Part Number: Prefix - ID X CS

Example: MOR - 2 X 1V

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -20 to +400° F

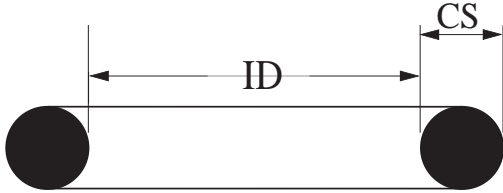

METRIC - O-RINGS

ID	C.S.	75 DURO		ID	C.S.	75 DURO		ID	C.S.	75 DURO	
		MP	LIST			MP	LIST			MP	LIST
19.0	2.0	5	\$.801	39.5	2.0	3	\$ 1.543	79.0	2.0	2	\$ 3.377
19.5	2.0	5	.814	40.0	2.0	3	1.551	80.0	2.0	2	3.417
20.0	2.0	5	.822	41.0	2.0	3	1.554	81.0	2.0	2	3.466
20.5	2.0	5	.832	42.0	2.0	3	1.59	82.0	2.0	2	3.532
21.0	2.0	5	.843	43.0	2.0	3	1.599	83.0	2.0	2	3.599
22.0	2.0	5	.887	44.0	2.0	3	1.621	84.0	2.0	1	3.666
22.5	2.0	5	.899	45.0	2.0	3	1.666	85.0	2.0	1	3.71
23.0	2.0	5	.908	46.0	2.0	2	1.702	86.0	2.0	1	3.754
23.5	2.0	5	.91	47.0	2.0	2	1.76	87.0	2.0	1	3.799
24.0	2.0	5	.924	48.0	2.0	2	1.805	89.0	2.0	1	3.888
24.5	2.0	4	.932	49.0	2.0	2	1.843	90.0	2.0	1	3.91
25.0	2.0	4	.941	50.0	2.0	2	1.901	91.0	2.0	1	3.954
25.5	2.0	4	.954	51.0	2.0	2	1.932	93.0	2.0	1	3.999
26.0	2.0	4	.983	52.0	2.0	2	1.954	94.0	2.0	1	4.088
26.5	2.0	4	.999	53.0	2.0	2	1.999	96.0	2.0	1	4.199
27.0	2.0	4	1.026	54.0	2.0	2	2.01	98.0	2.0	1	4.266
27.5	2.0	4	1.043	55.0	2.0	2	2.021	99.0	2.0	1	4.354
28.0	2.0	4	1.072	56.0	2.0	2	2.066	100.0	2.0	1	4.377
28.5	2.0	4	1.088	57.0	2.0	2	2.088	105.0	2.0	1	8.666
29.0	2.0	4	1.117	58.0	2.0	2	2.11	13.46	2.08	1	.159
29.5	2.0	4	1.132	59.0	2.0	2	2.154	16.36	2.21	25	.233
30.0	2.0	4	1.136	60.0	2.0	2	2.188	3.3	2.4	10	.443
30.5	2.0	4	1.154	61.0	2.0	2	2.221	4.3	2.4	10	.466
31.0	2.0	4	1.143	62.0	2.0	2	2.243	4.6	2.4	10	.488
31.5	2.0	4	1.154	63.0	2.0	2	2.266	5.3	2.4	10	.499
32.0	2.0	3	1.21	64.0	2.0	2	2.31	5.5	2.4	8	.51
32.5	2.0	3	1.221	65.0	2.0	2	2.332	6.3	2.4	8	.508
33.0	2.0	3	1.243	66.0	2.0	2	2.399	6.6	2.4	8	.51
33.5	2.0	3	1.266	67.0	2.0	2	2.443	7.3	2.4	8	.521
34.0	2.0	3	1.288	68.0	2.0	2	2.488	7.5	2.4	8	.532
34.5	2.0	3	1.31	69.0	2.0	2	2.532	7.6	2.4	8	.543
35.0	2.0	3	1.346	70.0	2.0	2	2.554	8.3	2.4	8	.554
35.5	2.0	3	1.354	71.0	2.0	2	2.666	8.6	2.4	8	.58
36.0	2.0	3	1.366	72.0	2.0	2	2.777	9.3	2.4	8	.599
36.5	2.0	3	1.377	73.0	2.0	2	2.888	9.6	2.4	8	.621
37.0	2.0	3	1.395	74.0	2.0	2	2.999	9.8	2.4	6	.673
37.5	2.0	3	1.421	75.0	2.0	2	3.087	10.3	2.4	6	.641
38.0	2.0	3	1.464	76.0	2.0	2	3.177	10.6	2.4	6	.666
38.5	2.0	3	1.488	77.0	2.0	2	3.243	10.8	2.4	6	.712
39.0	2.0	3	1.533	78.0	2.0	2	3.31	11.0	2.4	6	.712

O-Rings - Fluorocarbon


Ordering Information

Part Number: Prefix - ID X CS

Example: MOR - 2 X 1V

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -20 to +400° F

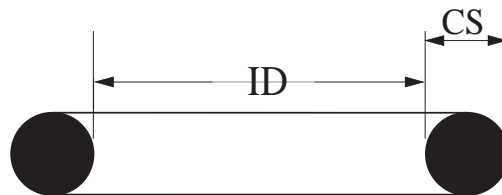

ID	C.S.	75 DURO		ID	C.S.	75 DURO		ID	C.S.	75 DURO	
		MP	LIST			MP	LIST			MP	LIST
11.3	2.4	5	\$.677	33.3	2.4	3	\$1.554	17.0	2.5	6	\$.886
11.6	2.4	5	.466	34.6	2.4	3	1.643	17.5	2.5	6	.91
11.8	2.4	5	.763	37.6	2.4	3	1.71	18.0	2.5	6	.924
12.3	2.4	5	.726	39.6	2.4	3	1.821	19.0	2.5	6	.951
12.6	2.4	5	.732	41.6	2.4	3	1.91	19.5	2.5	6	.954
13.3	2.4	5	.75	44.6	2.4	2	1.999	20.0	2.5	4	.967
13.6	2.4	5	.777	47.6	2.4	2	2.066	21.0	2.5	4	1.021
13.8	2.4	5	.827	49.6	2.4	2	2.14	21.5	2.5	4	1.066
14.3	2.4	5	.786	51.6	2.4	2	2.221	22.0	2.5	4	1.089
14.6	2.4	5	.81	54.6	2.4	2	2.31	22.5	2.5	4	1.088
14.8	2.4	5	.863	57.6	2.4	2	2.399	23.0	2.5	4	1.11
15.3	2.4	5	.821	61.6	2.4	2	2.554	23.5	2.5	4	1.132
15.6	2.4	5	.843	64.6	2.4	2	2.666	24.0	2.5	4	1.154
15.8	2.4	5	.897	67.6	2.4	2	2.71	25.0	2.5	4	1.173
16.3	2.4	5	.853	69.6	2.4	2	2.754	26.0	2.5	4	1.199
17.3	2.4	5	.875	70.5	2.4	2	2.999	27.0	2.5	3	1.241
17.6	2.4	5	.91	17.93	2.46	20	.241	28.0	2.5	3	1.266
17.8	2.4	5	.977	19.18	2.46	20	.266	29.0	2.5	3	1.31
18.3	2.4	5	.91	5.0	2.5	10	.51	30.0	2.5	3	1.354
18.6	2.4	5	.929	6.0	2.5	10	.524	31.0	2.5	3	1.377
19.3	2.4	5	.943	6.5	2.5	10	.532	32.0	2.5	3	1.625
19.6	2.4	5	.943	7.0	2.5	10	.543	33.0	2.5	3	1.654
19.8	2.4	5	1.045	7.5	2.5	10	.554	33.5	2.5	3	1.666
20.3	2.4	5	.977	8.0	2.5	10	.567	34.0	2.5	3	1.688
20.5	2.4	5	.993	8.5	2.5	10	.599	34.5	2.5	3	1.688
20.8	2.4	5	1.081	9.0	2.5	6	.621	35.0	2.5	3	1.688
21.3	2.4	5	.999	9.5	2.5	6	.643	36.0	2.5	2	1.732
21.6	2.4	5	1.028	10.0	2.5	6	.656	36.5	2.5	2	1.754
21.8	2.4	5	1.144	10.5	2.5	6	.688	37.0	2.5	2	1.777
22.3	2.4	5	.999	11.0	2.5	6	.697	38.0	2.5	2	1.799
23.3	2.4	5	1.088	11.5	2.5	6	.732	39.0	2.5	2	1.821
23.5	2.4	5	1.099	12.0	2.5	6	.75	40.0	2.5	2	1.843
24.6	2.4	4	1.132	12.5	2.5	6	.754	41.0	2.5	2	1.888
25.0	2.4	4	1.143	13.0	2.5	6	.761	42.0	2.5	2	1.932
25.3	2.4	4	1.177	13.5	2.5	6	.777	43.0	2.5	2	1.954
27.3	2.4	4	1.199	14.0	2.5	6	.80	44.0	2.5	2	1.977
27.5	2.4	4	1.243	15.0	2.5	6	.822	45.0	2.5	2	2.021
29.6	2.4	4	1.274	15.5	2.5	6	.843	46.0	2.5	2	2.043
30.3	2.4	4	1.354	16.0	2.5	6	.864	47.0	2.5	2	2.066
31.6	2.4	4	1.466	16.5	2.5	6	.866	48.0	2.5	2	2.132

O-Rings - Fluorocarbon


Ordering Information

Part Number: Prefix - ID X CS

Example: MOR - 2 X 1V

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -20 to +400° F

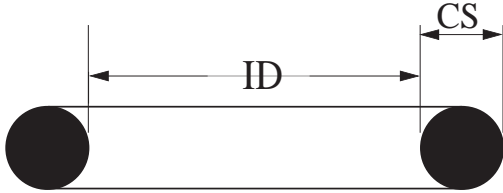

METRIC - O-RINGS

ID	C.S.	75 DURO		ID	C.S.	75 DURO		ID	C.S.	75 DURO	
		MP	LIST			MP	LIST			MP	LIST
49.0	2.5	2	\$ 2.154	89.0	2.5	1	\$ 4.31	40.94	2.62	8	\$.521
50.0	2.5	2	2.177	90.0	2.5	1	4.332	42.52	2.62	8	.521
51.0	2.5	2	2.199	91.0	2.5	1	4.399	44.12	2.62	8	.541
52.0	2.5	2	2.243	92.0	2.5	1	4.443	45.69	2.62	8	.566
53.0	2.5	2	2.288	93.0	2.5	1	4.51	47.29	2.62	8	.566
54.0	2.5	2	2.31	94.0	2.5	1	4.577	48.9	2.62	8	.588
55.0	2.5	2	2.354	95.0	2.5	1	4.599	50.47	2.62	8	.632
56.0	2.5	2	2.377	96.0	2.5	1	4.666	52.07	2.62	8	.654
57.0	2.5	2	2.421	97.0	2.5	1	4.71	53.64	2.62	8	.677
58.0	2.5	2	2.466	98.0	2.5	1	4.777	55.25	2.62	8	.699
59.0	2.5	2	2.51	99.0	2.5	1	4.843	56.82	2.62	6	.721
60.0	2.5	2	2.51	100.0	2.5	1	5.354	58.42	2.62	6	.743
61.0	2.5	2	2.532	1.24	2.62	35	.132	59.99	2.62	6	.743
62.0	2.5	2	2.554	2.06	2.62	35	.137	61.6	2.62	6	.766
63.0	2.5	2	2.577	2.84	2.62	35	.143	63.17	2.62	6	.766
64.0	2.5	2	2.71	3.63	2.62	35	.154	64.77	2.62	6	.81
65.0	2.5	2	2.71	4.42	2.62	35	.141	66.34	2.62	6	.832
66.0	2.5	2	2.71	5.23	2.62	35	.141	67.95	2.62	6	.854
67.0	2.5	2	2.732	6.02	2.62	35	.15	69.52	2.62	6	.877
68.0	2.5	2	2.754	7.59	2.62	25	.16	71.12	2.62	6	.899
69.0	2.5	2	2.777	9.19	2.62	25	.168	72.69	2.62	4	.966
70.0	2.5	2	2.821	10.77	2.62	25	.177	75.87	2.62	4	1.054
71.0	2.5	2	2.866	12.37	2.62	25	.199	82.22	2.62	4	1.166
72.0	2.5	1	3.221	13.94	2.62	25	.199	88.57	2.62	4	1.277
73.0	2.5	1	3.332	15.54	2.62	25	.199	94.92	2.62	4	1.388
74.0	2.5	1	3.443	17.12	2.62	15	.221	101.27	2.62	3	1.454
75.0	2.5	1	3.51	18.72	2.62	15	.243	107.62	2.62	3	1.61
76.0	2.5	1	3.666	20.3	2.62	15	.26	113.97	2.62	3	1.766
77.0	2.5	1	3.71	21.89	2.62	15	.266	120.32	2.62	3	1.877
78.0	2.5	1	3.732	23.47	2.62	15	.288	126.67	2.62	2	2.054
79.0	2.5	1	3.799	25.07	2.62	10	.31	133.02	2.62	2	2.343
80.0	2.5	1	3.843	26.64	2.62	10	.343	139.37	2.62	2	2.588
81.0	2.5	1	3.91	28.24	2.62	10	.366	145.72	2.62	2	2.788
82.0	2.5	1	3.977	29.82	2.62	10	.388	152.07	2.62	2	3.01
83.0	2.5	1	4.043	31.42	2.62	10	.388	158.42	2.62	2	3.188
84.0	2.5	1	4.11	32.99	2.62	10	.41	164.77	2.62	2	3.499
85.0	2.5	1	4.177	34.59	2.62	10	.432	171.12	2.62	2	3.566
86.0	2.5	1	4.221	36.17	2.62	10	.454	177.47	2.62	1	3.61
87.0	2.5	1	4.266	37.77	2.62	10	.477	183.82	2.62	1	3.788
88.0	2.5	1	4.288	39.34	2.62	10	.499	190.17	2.62	1	4.01

O-Rings - Fluorocarbon


Ordering Information

Part Number: Prefix - ID X CS

Example: MOR - 2 X 1V

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -20 to +400° F

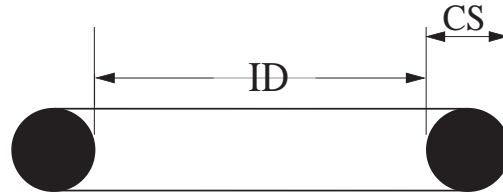

ID	C.S.	75 DURO		ID	C.S.	75 DURO		ID	C.S.	75 DURO	
		MP	LIST			MP	LIST			MP	LIST
196.52	2.62	1	\$ 4.677	17.0	3.0	5	\$ 1.011	36.2	3.0	2	\$ 1.965
202.87	2.62	1	4.899	17.5	3.0	5	1.021	37.0	3.0	2	2.021
209.22	2.62	1	5.121	18.0	3.0	5	1.062	37.47	3.0	2	.654
215.57	2.62	1	5.121	18.5	3.0	5	1.066	38.0	3.0	2	2.054
221.92	2.62	1	5.232	19.0	3.0	5	1.092	38.5	3.0	2	2.066
228.27	2.62	1	5.432	19.2	3.0	4	1.092	39.0	3.0	2	2.088
234.62	2.62	1	5.788	20.0	3.0	4	1.121	39.2	3.0	2	2.114
240.97	2.62	1	5.899	20.5	3.0	4	1.132	40.0	3.0	2	2.154
247.32	2.62	1	6.188	21.0	3.0	4	1.154	41.0	3.0	2	2.206
16.9	2.7	5	.94	21.2	3.0	4	1.177	42.0	3.0	2	2.254
21.92	2.95	15	.303	22.0	3.0	4	1.219	42.2	3.0	2	2.266
23.47	2.95	15	.343	22.2	3.0	4	1.221	43.0	3.0	2	2.332
25.04	2.95	15	.357	23.0	3.0	4	1.243	43.69	3.0	2	.897
26.59	2.95	15	.381	23.5	3.0	4	1.31	44.0	3.0	2	2.399
29.74	2.95	10	.426	24.0	3.0	4	1.316	44.2	3.0	2	2.44
34.42	2.95	10	.497	24.2	3.0	3	1.321	45.0	3.0	2	2.44
5.0	3.0	10	.582	24.6	3.0	3	1.332	46.0	3.0	2	2.44
5.5	3.0	10	.599	25.0	3.0	3	1.339	46.2	3.0	2	2.44
6.0	3.0	10	.643	25.5	3.0	3	1.377	47.0	3.0	2	2.44
6.5	3.0	8	.666	26.0	3.0	3	1.387	48.0	3.0	2	2.44
7.0	3.0	5	.699	26.2	3.0	3	1.435	49.0	3.0	2	2.488
7.5	3.0	5	.71	27.0	3.0	3	1.443	49.5	3.0	2	2.51
8.0	3.0	5	.732	27.5	3.0	3	1.483	50.0	3.0	2	2.532
8.5	3.0	5	.777	28.0	3.0	3	1.51	50.5	3.0	2	2.554
9.0	3.0	5	.799	28.5	3.0	3	1.532	51.0	3.0	2	2.577
9.5	3.0	5	.821	29.0	3.0	3	1.54	52.0	3.0	2	2.599
10.0	3.0	5	.843	29.2	3.0	3	1.548	53.0	3.0	2	2.631
10.5	3.0	5	.866	30.0	3.0	3	1.549	53.09	3.0	2	.95
11.0	3.0	5	.888	30.5	3.0	3	1.621	54.0	3.0	2	2.631
11.5	3.0	5	.91	31.0	3.0	3	1.643	54.5	3.0	2	2.642
12.0	3.0	5	.929	31.2	3.0	3	1.69	55.0	3.0	2	2.643
12.5	3.0	5	.943	32.0	3.0	3	1.69	56.0	3.0	2	2.688
13.0	3.0	5	.954	32.2	3.0	3	1.71	57.0	3.0	2	2.733
13.5	3.0	5	.954	33.0	3.0	3	1.738	58.0	3.0	2	2.779
14.0	3.0	5	.96	33.5	3.0	3	1.777	59.0	3.0	2	2.821
14.5	3.0	5	.968	34.0	3.0	2	1.82	59.36	3.0	2	1.039
15.0	3.0	5	.972	34.2	3.0	2	1.843	59.5	3.0	2	2.847
15.5	3.0	5	.977	35.0	3.0	2	1.904	60.0	3.0	2	2.888
16.0	3.0	5	.977	35.5	3.0	2	1.904	61.0	3.0	2	2.932
16.5	3.0	5	.999	36.0	3.0	2	1.954	62.0	3.0	2	2.977

O-Rings - Fluorocarbon


Ordering Information

Part Number: Prefix - ID X CS

Example: MOR - 2 X 1V

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -20 to +400° F

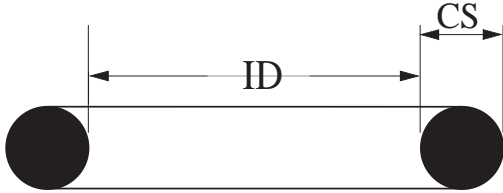

METRIC - O-RINGS

ID	C.S.	75 DURO		ID	C.S.	75 DURO		ID	C.S.	75 DURO	
		MP	LIST			MP	LIST			MP	LIST
63.0	3.0	1	\$ 3.008	95.0	3.0	1	\$ 5.154	84.4	3.1	1	\$ 5.486
64.0	3.0	1	3.043	96.0	3.0	1	5.188	89.4	3.1	1	5.76
64.5	3.0	1	3.066	97.0	3.0	1	5.221	94.4	3.1	1	6.067
65.0	3.0	1	3.088	98.0	3.0	1	5.266	99.4	3.1	1	6.378
66.0	3.0	1	3.154	99.0	3.0	1	5.31	104.4	3.1	1	6.685
67.0	3.0	1	3.177	99.5	3.0	1	5.372	109.4	3.1	1	6.992
68.0	3.0	1	3.221	100.0	3.0	1	5.398	114.4	3.1	1	7.303
69.0	3.0	1	3.288	101.0	3.0	1	5.451	119.4	3.1	1	7.61
69.5	3.0	1	3.303	102.0	3.0	1	5.504	124.4	3.1	1	7.917
70.0	3.0	1	3.377	103.0	3.0	1	5.532	129.4	3.1	1	8.623
71.0	3.0	1	3.466	104.0	3.0	1	5.577	134.4	3.1	1	8.938
71.2	3.0	1	3.51	104.5	3.0	1	5.634	139.4	3.1	1	9.264
72.0	3.0	1	3.554	105.0	3.0	1	5.666	144.4	3.1	1	9.585
73.0	3.0	1	3.599	106.0	3.0	1	5.71	8.0	3.5	4	.91
74.0	3.0	1	3.643	107.0	3.0	1	5.754	9.0	3.5	4	.932
74.5	3.0	1	3.688	108.0	3.0	1	5.818	10.0	3.5	4	1.021
75.0	3.0	1	3.733	109.0	3.0	1	5.843	13.0	3.5	4	1.088
76.0	3.0	1	3.777	109.5	3.0	1	5.896	15.0	3.5	4	1.177
77.0	3.0	1	3.843	114.5	3.0	1	6.159	16.0	3.5	4	1.199
78.0	3.0	1	3.91	119.5	3.0	1	6.421	18.0	3.5	4	1.332
79.0	3.0	1	3.977	122.0	3.0	1	6.551	19.0	3.5	4	1.354
79.5	3.0	1	4.043	124.0	3.0	1	6.657	20.0	3.5	4	1.377
80.0	3.0	1	4.066	129.5	3.0	1	7.247	21.0	3.5	4	1.421
81.0	3.0	1	4.11	130.0	3.0	1	7.273	22.0	3.5	4	1.488
82.0	3.0	1	4.132	134.5	3.0	1	8.146	23.0	3.5	4	1.554
83.0	3.0	1	4.221	145.0	3.0	1	9.11	24.0	3.5	3	1.621
84.0	3.0	1	4.31	164.5	3.0	1	9.924	25.0	3.5	3	1.666
84.5	3.0	1	4.367	169.5	3.0	1	10.22	26.0	3.5	3	1.732
85.0	3.0	1	4.421	24.4	3.1	3	1.765	27.0	3.5	3	1.777
86.0	3.0	1	4.488	29.4	3.1	3	2.096	28.0	3.5	3	1.843
87.0	3.0	1	4.532	34.4	3.1	2	2.384	29.0	3.5	2	1.91
88.0	3.0	1	4.577	39.4	3.1	2	2.694	30.0	3.5	2	1.954
89.0	3.0	1	4.621	44.4	3.1	2	3.162	31.0	3.5	2	2.021
89.5	3.0	1	4.637	49.4	3.1	2	3.313	32.0	3.5	2	2.088
90.0	3.0	1	4.666	54.4	3.1	2	3.814	33.0	3.5	2	2.199
91.0	3.0	1	4.843	59.4	3.1	2	3.888	34.0	3.5	2	2.221
92.0	3.0	1	4.91	64.4	3.1	1	4.528	35.0	3.5	2	2.266
93.0	3.0	1	4.977	69.4	3.1	1	4.528	36.0	3.5	2	2.31
94.0	3.0	1	5.038	74.4	3.1	1	4.835	40.0	3.5	2	2.554
94.5	3.0	1	5.066	79.4	3.1	1	5.145	50.0	3.5	2	3.132

O-Rings - Fluorocarbon


Ordering Information

Part Number: Prefix - ID X CS

Example: MOR - 2 X 1V

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -20 to +400° F

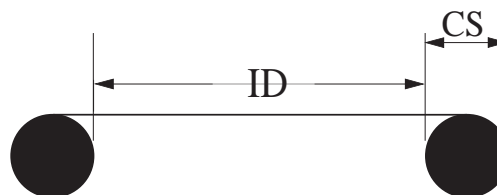

ID	C.S.	75 DURO		ID	C.S.	75 DURO		ID	C.S.	75 DURO	
		MP	LIST			MP	LIST			MP	LIST
55.0	3.5	1	\$ 3.621	75.79	3.53	2	\$ 1.499	253.59	3.53	1	\$ 7.454
60.0	3.5	1	3.954	78.97	3.53	2	1.566	266.29	3.53	1	7.721
65.0	3.5	1	4.243	82.14	3.53	2	1.632	278.99	3.53	1	7.832
70.0	3.5	1	4.777	85.32	3.53	2	1.699	291.69	3.53	1	8.099
100.0	3.5	1	6.71	88.49	3.53	2	1.766	304.39	3.53	1	8.321
4.34	3.53	20	.23	91.67	3.53	2	1.832	329.79	3.53	1	8.743
5.94	3.53	20	.252	94.84	3.53	2	1.877	355.19	3.53	1	8.899
7.52	3.53	20	.266	98.02	3.53	2	1.988	380.59	3.53	1	9.921
9.12	3.53	20	.277	101.19	3.53	2	2.01	405.26	3.53	1	10.232
10.69	3.53	20	.277	104.37	3.53	2	2.121	430.66	3.53	1	10.454
12.29	3.53	15	.282	107.54	3.53	2	2.21	456.06	3.53	1	11.677
13.87	3.53	15	.299	110.72	3.53	2	2.254	10.0	4.0	4	1.088
15.47	3.53	15	.299	113.89	3.53	2	2.343	11.0	4.0	4	1.166
17.04	3.53	15	.321	117.07	3.53	2	2.388	12.0	4.0	4	1.243
18.64	3.53	15	.343	120.24	3.53	2	2.432	14.0	4.0	4	1.40
20.22	3.53	10	.366	123.42	3.53	2	2.499	15.0	4.0	4	1.466
21.82	3.53	10	.393	126.59	3.53	2	2.654	16.0	4.0	4	1.555
23.39	3.53	10	.432	129.77	3.53	2	2.766	17.0	4.0	4	1.621
24.99	3.53	10	.477	132.94	3.53	2	2.943	18.0	4.0	4	1.675
26.57	3.53	10	.499	136.12	3.53	2	2.988	19.0	4.0	4	1.71
28.17	3.53	8	.521	139.29	3.53	2	3.099	20.0	4.0	3	1.769
29.74	3.53	8	.521	142.47	3.53	2	3.232	21.0	4.0	3	1.821
31.34	3.53	8	.566	145.64	3.53	2	3.343	22.0	4.0	3	1.888
32.92	3.53	8	.61	148.82	3.53	2	3.454	23.0	4.0	3	1.969
34.52	3.53	8	.643	151.99	3.53	2	3.543	24.0	4.0	3	1.996
36.09	3.53	8	.666	158.34	3.53	2	3.61	25.0	4.0	2	2.02
37.69	3.53	8	.71	164.69	3.53	2	3.677	26.0	4.0	2	2.088
40.87	3.53	8	.754	171.04	3.53	1	3.788	27.0	4.0	2	2.154
44.04	3.53	8	.821	177.39	3.53	1	4.01	28.0	4.0	2	2.228
47.22	3.53	8	.888	183.74	3.53	1	4.41	29.0	4.0	2	2.266
50.39	3.53	5	.999	190.09	3.53	1	4.988	30.0	4.0	2	2.368
53.57	3.53	5	1.066	196.44	3.53	1	5.343	31.0	4.0	2	2.438
56.74	3.53	5	1.11	202.79	3.53	1	5.566	32.0	4.0	2	2.508
59.92	3.53	5	1.177	209.14	3.53	1	5.832	33.0	4.0	2	2.577
63.09	3.53	5	1.221	215.49	3.53	1	6.054	34.0	4.0	2	2.554
66.27	3.53	3	1.299	221.84	3.53	1	6.277	35.0	4.0	2	2.717
69.44	3.53	3	1.343	228.19	3.53	1	6.499	36.0	4.0	2	2.787
72.62	3.53	3	1.41	234.54	3.53	1	6.743	37.0	4.0	2	2.857
73.02	3.53	1	4.821	240.89	3.53	1	6.966	38.0	4.0	2	2.927
74.6	3.53	1	4.932	247.24	3.53	1	7.032	39.0	4.0	2	2.999

O-Rings - Fluorocarbon


Ordering Information

Part Number: Prefix - ID X CS

Example: MOR - 2 X 1V

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -20 to +400° F

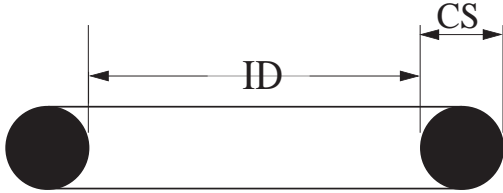

METRIC - O-RINGS

ID	C.S.	75 DURO		ID	C.S.	75 DURO		ID	C.S.	75 DURO	
		MP	LIST			MP	LIST			MP	LIST
40.0	4.0	2	\$ 3.064	46.0	5.0	1	\$ 5.037	56.52	5.33	2	\$ 2.121
41.0	4.0	2	3.134	47.0	5.0	1	5.135	59.69	5.33	2	2.41
42.0	4.0	2	3.177	52.0	5.0	1	5.483	62.87	5.33	2	2.499
43.0	4.0	2	3.221	55.0	5.0	1	5.751	66.04	5.33	2	2.61
44.0	4.0	2	3.343	63.0	5.0	1	6.715	69.22	5.33	2	2.766
45.0	4.0	2	3.414	64.0	5.0	1	6.813	72.39	5.33	2	2.966
46.0	4.0	2	3.443	67.0	5.0	1	7.109	75.57	5.33	2	3.121
47.0	4.0	2	3.553	70.0	5.0	1	7.595	78.74	5.33	2	3.299
48.0	4.0	2	3.621	87.0	5.0	1	9.783	81.92	5.33	2	3.521
50.0	4.0	2	3.666	90.0	5.0	1	10.102	85.09	5.33	2	3.699
51.0	4.0	2	3.732	100.0	5.0	1	10.931	88.27	5.33	2	3.788
52.0	4.0	2	3.799	135.0	5.0	1	15.246	91.44	5.33	2	3.921
53.0	4.0	2	3.866	158.0	5.0	1	17.735	94.62	5.33	2	3.988
54.0	4.0	2	3.947	160.0	5.0	1	17.96	97.79	5.33	1	4.121
55.0	4.0	2	4.014	170.0	5.0	1	19.053	100.97	5.33	1	4.232
60.0	4.0	2	4.46	200.0	5.0	1	22.318	104.14	5.33	1	4.41
62.0	4.0	2	4.597	220.0	5.0	1	24.504	107.32	5.33	1	4.432
63.0	4.0	2	4.667	225.0	5.0	1	25.043	110.49	5.33	1	4.543
65.0	4.0	2	4.808	10.46	5.33	5	.788	113.67	5.33	1	4.677
68.0	4.0	2	5.074	12.07	5.33	5	.832	116.84	5.33	1	4.788
70.0	4.0	2	5.277	13.64	5.33	5	.899	120.02	5.33	1	5.01
72.0	4.0	2	5.48	15.24	5.33	5	.943	123.19	5.33	1	5.077
80.0	4.0	2	6.261	16.81	5.33	5	.966	126.37	5.33	1	5.232
85.0	4.0	2	6.636	18.42	5.33	5	.988	129.54	5.33	1	5.254
110.0	4.0	2	8.312	19.99	5.33	5	1.032	132.72	5.33	1	5.299
120.0	4.0	2	9.043	21.59	5.33	5	1.032	135.89	5.33	1	5.899
124.0	4.0	2	11.13	23.16	5.33	5	1.054	139.07	5.33	1	6.121
135.0	4.0	2	10.697	24.77	5.33	5	1.077	142.24	5.33	1	6.343
140.0	4.0	2	11.083	26.34	5.33	5	1.099	145.42	5.33	1	6.854
142.0	4.0	2	11.234	27.94	5.33	5	1.121	148.59	5.33	1	7.299
145.0	4.0	2	11.473	29.51	5.33	5	1.143	151.77	5.33	1	7.81
150.0	4.0	2	11.851	31.12	5.33	5	1.143	158.12	5.33	1	8.166
85.0	4.5	2	8.103	32.69	5.33	5	1.277	164.47	5.33	1	8.188
15.0	5.0	2	2.228	34.29	5.33	5	1.343	170.82	5.33	1	8.232
25.0	5.0	2	2.962	37.47	5.33	5	1.432	177.17	5.33	1	8.454
28.0	5.0	2	3.258	40.64	5.33	3	1.521	183.52	5.33	1	9.343
35.0	5.0	2	4.443	43.82	5.33	3	1.566	189.87	5.33	1	10.032
40.0	5.0	2	4.444	46.99	5.33	3	1.677	196.22	5.33	1	10.454
42.0	5.0	2	4.641	50.17	5.33	3	1.899	199.3	5.33	1	27.666
44.0	5.0	1	4.838	53.34	5.33	2	2.077	202.57	5.33	1	10.743

O-Rings - Fluorocarbon


Ordering Information

Part Number: Prefix - ID X CS

Example: MOR - 2 X 1V

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -20 to +400° F

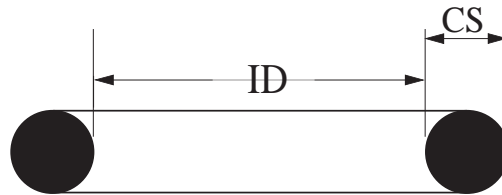

ID	C.S.	75 DURO		ID	C.S.	75 DURO		ID	C.S.	75 DURO	
		MP	LIST			MP	LIST			MP	LIST
208.92	5.33	1	\$ 10.899	54.2	5.7	1	\$ 7.096	174.3	5.7	1	\$ 24.288
209.3	5.33	1	28.999	54.6	5.7	1	6.836	179.3	5.7	1	24.954
215.27	5.33	1	11.477	55.6	5.7	1	7.476	184.3	5.7	1	25.643
219.3	5.33	1	30.332	57.6	5.7	1	7.476	189.3	5.7	1	26.31
221.62	5.33	1	11.788	59.2	5.7	1	7.902	194.3	5.7	1	26.977
227.97	5.33	1	11.899	59.6	5.7	1	8.643	120.0	6.0	1	17.464
229.3	5.33	1	31.704	61.6	5.7	1	7.798	34.29	6.99	1	7.595
234.32	5.33	1	12.01	62.6	5.7	1	7.832	37.46	6.99	1	7.797
239.3	5.33	1	33.043	64.6	5.7	1	8.838	40.64	6.99	1	8.08
240.67	5.33	1	12.788	66.6	5.7	1	8.838	43.81	6.99	1	8.443
247.02	5.33	1	13.477	69.2	5.7	1	9.366	46.99	6.99	1	8.767
249.3	5.33	1	34.399	69.6	5.7	1	8.867	50.16	6.99	1	9.049
253.37	5.33	1	14.054	70.6	5.7	1	8.867	53.34	6.99	1	9.332
259.3	5.33	1	35.754	74.2	5.7	1	10.254	56.51	6.99	1	9.615
266.07	5.33	1	15.543	74.6	5.7	1	9.372	59.69	6.99	1	9.898
269.3	5.33	1	37.554	79.2	5.7	1	11.67	62.86	6.99	1	10.181
279.3	5.33	1	38.91	79.6	5.7	1	9.928	66.04	6.99	1	10.464
289.3	5.33	1	41.266	84.6	5.7	1	10.484	69.21	6.99	1	10.746
299.3	5.33	1	42.643	89.3	5.7	1	12.50	72.39	6.99	1	11.029
278.77	5.33	1	16.654	89.6	5.7	1	11.036	75.56	6.99	1	11.312
291.47	5.33	1	16.677	94.6	5.7	1	11.451	78.74	6.99	1	11.595
304.17	5.33	1	17.521	99.6	5.7	1	11.836	81.91	6.99	1	11.878
329.57	5.33	1	18.077	101.6	5.7	1	11.836	85.09	6.99	1	12.16
354.97	5.33	1	19.01	104.6	5.7	1	12.378	88.26	6.99	1	12.443
380.37	5.33	1	19.966	109.6	5.7	1	12.921	91.44	6.99	1	12.726
405.26	5.33	1	20.943	111.6	5.7	1	12.921	94.61	6.99	1	13.009
430.66	5.33	1	22.188	114.6	5.7	1	14.254	97.79	6.99	1	13.292
456.06	5.33	1	23.454	119.6	5.7	1	14.00	100.96	6.99	1	13.575
481.46	5.33	1	26.032	124.6	5.7	1	15.309	104.14	6.99	1	13.858
506.86	5.33	1	26.588	129.6	5.7	1	15.884	107.31	6.99	1	14.14
532.26	5.33	1	27.166	131.6	5.7	1	15.884	110.49	6.99	1	14.423
557.66	5.33	1	28.321	134.6	5.7	1	16.45	113.67	6.99	1	6.41
582.68	5.33	1	29.121	139.6	5.7	1	17.026	116.84	6.99	1	6.454
608.08	5.33	1	29.966	144.6	5.7	1	17.581	120.02	6.99	1	6.588
633.48	5.33	1	34.254	149.3	5.7	1	20.912	123.19	6.99	1	7.077
658.88	5.33	1	37.743	149.6	5.7	1	17.581	126.37	6.99	1	7.232
47.6	5.7	1	6.237	154.3	5.7	1	21.577	129.54	6.99	1	7.277
49.6	5.7	1	6.50	159.3	5.7	1	22.266	132.72	6.99	1	7.454
51.6	5.7	1	6.50	164.3	5.7	1	22.932	135.89	6.99	1	7.543
52.6	5.7	1	6.714	169.3	5.7	1	23.599	139.07	6.99	1	7.877

O-Rings - Fluorocarbon


Ordering Information

Part Number: Prefix - ID X CS

Example: MOR - 2 X 1V

Metric O-Rings are offered in minimum package quantities (MP in chart).

Temperature Range: -20 to +400° F

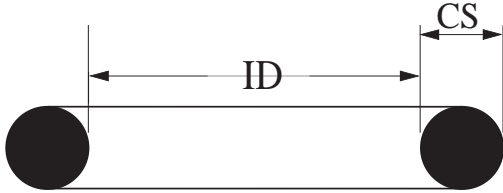

ID	C.S.	75 DURO	
		MP	LIST
142.24	6.99	1	\$ 8.032
145.42	6.99	1	8.121
148.59	6.99	1	8.877
151.77	6.99	1	8.543
158.12	6.99	1	8.854
164.47	6.99	1	9.277
170.82	6.99	1	9.566
177.17	6.99	1	10.232
183.52	6.99	1	11.143
189.87	6.99	1	11.81
196.22	6.99	1	12.254
202.57	6.99	1	12.566
215.27	6.99	1	13.21
227.97	6.99	1	13.788
240.67	6.99	1	14.388
253.37	6.99	1	15.521
266.07	6.99	1	16.766
278.77	6.99	1	17.077
291.47	6.99	1	17.81
304.17	6.99	1	18.432
316.87	6.99	1	19.143
329.57	6.99	1	19.81
342.27	6.99	1	19.877
354.97	6.99	1	21.143
367.67	6.99	1	21.388
380.37	6.99	1	22.188
393.07	6.99	1	22.543
405.26	6.99	1	26.877
417.96	6.99	1	28.632
430.66	6.99	1	30.343
443.36	6.99	1	31.299
456.06	6.99	1	32.343
468.76	6.99	1	32.793
481.46	6.99	1	34.143
494.16	6.99	1	34.899
506.86	6.99	1	34.999
532.26	6.99	1	38.121
557.66	6.99	1	39.677
582.68	6.99	1	40.966
608.08	6.99	1	42.788

ID	C.S.	75 DURO	
		MP	LIST
633.48	6.99	1	\$ 48.121
658.88	6.99	1	49.966
149.5	8.4	1	36.637
154.5	8.4	1	37.755
159.5	8.4	1	38.874
164.5	8.4	1	39.992
169.5	8.4	1	41.143
174.5	8.4	1	42.261
179.5	8.4	1	43.379
184.5	8.4	1	44.53
189.5	8.4	1	45.649
194.5	8.4	1	46.767
199.5	8.4	1	47.885
204.5	8.4	1	49.036
208.5	8.4	1	49.036
209.5	8.4	1	51.273
214.5	8.4	1	51.273
219.5	8.4	1	53.509
224.5	8.4	1	54.66
229.5	8.4	1	54.66
234.5	8.4	1	55.778
239.5	8.4	1	58.048
244.5	8.4	1	58.043
249.5	8.4	1	64.066
254.5	8.4	1	69.296
259.5	8.4	1	77.682
264.5	8.4	1	78.472
269.5	8.4	1	80.906
274.5	8.4	1	82.682
249.5	8.4	1	83.175
284.5	8.4	1	84.359
289.5	8.4	1	85.543
294.5	8.4	1	86.497
299.5	8.4	1	87.615
314.5	8.4	1	88.70
319.5	8.4	1	90.542
334.5	8.4	1	92.45
339.5	8.4	1	94.357
354.5	8.4	1	96.824
359.5	8.4	1	99.619

ID	C.S.	75 DURO	
		MP	LIST
374.5	8.4	1	\$102.579
384.5	8.4	1	106.066
399.5	8.4	1	107.578

O-Ring Kits

Common Japanese Sized O-Rings in 70 Durometer

Part Number: Metric O Kit - J

I.D.	C.S	QUANTITY	I.D.	C.S	QUANTITY
2.8	1.9	25	20.8	2.4	8
3.8	1.9	20	21.8	2.4	8
4.8	1.9	20	24.4	3.1	6
5.8	1.9	20	29.4	3.1	7
6.8	1.9	15	21.7	3.5	5
7.8	1.9	15	22.1	3.5	5
8.8	1.9	15	23.7	3.5	7
9.8	1.9	15	24.7	3.5	7
9.8	2.4	15	25.2	3.5	7
10.8	2.4	15	25.7	3.5	7
11.0	2.4	15	27.7	3.5	7
11.8	2.4	12	28.7	3.5	6
12.8	2.4	12	29.2	3.5	6
13.8	2.4	12	29.7	3.5	6
14.8	2.4	12	30.7	3.5	6
15.8	2.4	12	31.2	3.5	6
17.8	2.4	8	14.5	4.0	4
19.8	2.4	8	23.5	4.0	6

List Price: \$37.03



This 380 piece kit contains the most popular Japanese Industrial metric O-Ring sizes.

Common Japanese Sized O-Rings in 90 Durometer

Part Number: Metric O Kit - J-90D

I.D.	C.S	QUANTITY	I.D.	C.S	QUANTITY
2.8	1.9	25	20.8	2.4	8
3.8	1.9	20	21.8	2.4	8
4.8	1.9	20	24.4	3.1	6
5.8	1.9	20	29.4	3.1	7
6.8	1.9	15	21.7	3.5	5
7.8	1.9	15	22.1	3.5	5
8.8	1.9	15	23.7	3.5	7
9.8	1.9	15	24.7	3.5	7
9.8	2.4	15	25.2	3.5	7
10.8	2.4	15	25.7	3.5	7
11.0	2.4	15	27.7	3.5	7
11.8	2.4	12	28.7	3.5	6
12.8	2.4	12	29.2	3.5	6
13.8	2.4	12	29.7	3.5	6
14.8	2.4	12	30.7	3.5	6
15.8	2.4	12	31.2	3.5	6
17.8	2.4	8	14.5	4.0	4
19.8	2.4	8	23.5	4.0	6

List Price: \$55.00



This 380 piece kit contains the most popular Japanese Industrial metric O-Ring sizes in 90 durometer NBR.

O-Ring Kits

Common European Sized O-Rings in 70 Durometer

Part Number: Metric O Kit - E

I.D.	C.S.	QUANTITY	I.D.	C.S.	QUANTITY
5.0	1.5	20	20.0	2.0	10
13.0	1.5	15	4.3	2.4	15
16.0	1.5	10	5.3	2.4	15
2.2	1.6	20	5.6	2.4	15
3.1	1.6	20	6.0	2.4	20
4.1	1.6	20	7.6	2.4	15
7.1	1.6	20	8.3	2.4	15
9.1	1.6	15	8.6	2.4	15
10.1	1.6	15	10.0	2.5	10
13.1	1.6	15	13.0	2.5	10
4.0	2.0	20	14.0	2.5	10
8.0	2.0	15	15.0	2.5	10
9.0	2.0	15	17.0	2.5	10
10.0	2.0	15	18.0	2.5	10
12.0	2.0	15	19.0	2.5	10
14.0	2.0	10	10.0	3.0	10
16.0	2.0	10	11.0	3.0	10
19.0	2.0	10	9.0	3.0	10

List Price: \$35.55



This 500 piece kit contains the most popular European metric O-Ring sizes.

Common European Sized O-Rings in 90 Durometer

Part Number: Metric O Kit - E-90D

I.D.	C.S.	QUANTITY	I.D.	C.S.	QUANTITY
5.0	1.5	20	19.0	2.0	10
13.0	1.5	15	20.0	2.0	10
16.0	1.5	10	4.3	2.4	15
2.2	1.6	20	5.3	2.4	15
3.1	1.6	20	5.6	2.4	15
4.1	1.6	20	7.6	2.4	15
7.1	1.6	20	8.3	2.4	15
9.1	1.6	15	8.6	2.4	15
10.1	1.6	15	10.0	2.5	10
13.1	1.6	15	13.0	2.5	10
4.0	2.0	20	14.0	2.5	10
6.0	2.0	20	15.0	2.5	10
8.0	2.0	15	17.0	2.5	10
9.0	2.0	15	18.0	2.5	10
10.0	2.0	15	19.0	2.5	10
12.0	2.0	15	9.0	3.0	10
14.0	2.0	10	10.0	3.0	10
16.0	2.0	10	11.0	3.0	10

List Price: \$55.00



This 500 piece kit contains the most popular European metric O-Ring sizes.

Back-up Rings

Ordering Information

Part Number: Prefix - ID X CS X W

Example: MBT - 18 X 2 X 1.5


MBT Manufactured in PTFE./MBU in Urethane

Sizes are in stock where prices are shown.

Temperature Range PTFE: -40 to +500° F

Temperature Range Urethane: -40 to +200° F

Back Up Ring C/S	O-Ring C/S
2.5	.31
3.0	.35
5.0	.57
7.5	.84

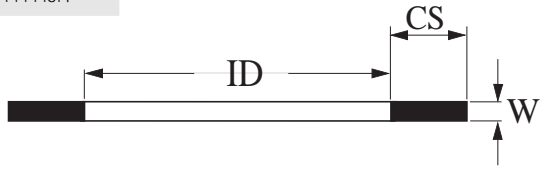

ID	C.S.	W	MBT	MBU
10.0	1.5	1.25	\$ 4.67	
13.0	1.5	1.0	3.06	
6.0	2.0	1.3		\$ 1.17
13.0	2.0	1.2	11.28	
14.0	2.0	1.3		.28
16.0	2.0	1.25	.78	
16.0	2.0	1.3		.89
18.0	2.0	1.5	2.85	
20.0	2.0	1.5	.79	
21.0	2.0	1.5	.79	
22.0	2.0	1.5	2.83	
28.0	2.0	1.5ST	5.67	
47.0	2.0	1.25	3.38	
53.0	2.0	1.25	3.87	
11.8	2.1	1.0	3.06	
20.0	2.5	1.0	3.96	
25.0	2.5	1.25	.63	
25.0	2.5	1.3		.38
25.0	2.5	1.5	.63	
30.0	2.5	1.3		.36
30.0	2.5	1.5	3.00	
32.0	2.5	1.5	10.83	
33.0	2.5	1.5		.37
35.0	2.5	1.3		.38
35.0	2.5	1.5	4.00	
37.0	2.5	1.3		.39
40.0	2.5	1.3		.40
40.0	2.5	1.5	3.82	
43.0	2.5	0.6	3.28	
43.0	2.5	1.3		.41
45.0	2.5	1.3		.42
45.0	2.5	1.5	3.87	
47.0	2.5	1.3		3.33
50.0	2.5	1.3		.44
50.0	2.5	1.5	3.87	
55.0	2.5	1.3		.52
55.0	2.5	1.5	3.98	
55.0	8.0	3.0	14.17	
57.0	2.5	1.5	4.53	
58.0	2.5	1.3		.53
60.0	2.5	1.5	4.19	

ID	C.S.	W	MBT	MBU
65.0	2.5	1.3		\$.56
65.0	2.5	1.5	\$ 4.19	
70.0	2.5	1.25	6.67	
70.0	2.5	1.3		.66
70.0	2.5	1.5	4.29	
72.5	2.5	1.3		2.50
75.0	2.5	1.3		.61
75.0	2.5	1.5	4.29	
80.0	2.5	1.25	5.44	
80.0	2.5	1.3		.63
80.0	2.5	1.5	4.35	
85.0	2.5	1.3		.67
85.0	2.5	1.5	4.40	
88.0	2.5	1.3	7.50	
90.0	2.5	1.3		.68
90.0	2.5	1.5	4.40	
95.0	2.5	1.3		.31
95.0	2.5	1.5	4.40	
98.0	2.5	1.3		.71
100.0	2.5	1.3		.72
100.0	2.5	1.5	4.51	
105.0	2.5	1.3		.89
105.0	2.5	1.5	4.61	
110.0	2.5	1.3		1.05
110.0	2.5	1.5	4.61	
115.0	2.5	1.3		1.08
115.0	2.5	1.5	4.72	
120.0	2.5	1.5	4.72	
125.0	2.5	1.3		1.08
125.0	2.5	1.5	6.75	
130.0	2.5	1.3		.98
130.0	2.5	1.5	4.82	
135.0	2.5	1.25	12.17	
135.0	2.5	1.5	5.04	
140.0	2.5	1.3		1.16
140.0	2.5	1.5	5.57	
145.0	2.5	1.5	5.67	
21.0	3.0	2.5	3.78	
22.0	3.0	1.5	.84	
22.4	3.0	1.5	.84	
24.0	3.0	1.5	.90	

Back-up Rings

Ordering Information

Part Number: Prefix - ID X CS X W


Example: MBT - 18 X 2 X 1.5

MBT Manufactured in PTFE./MBU in Urethane

Sizes are in stock where prices are shown.

Temperature Range: -40 to +500° F

Back Up Ring C/S	O-Ring C/S
2.5	3.1
3.0	3.5
5.0	5.7
7.5	8.4

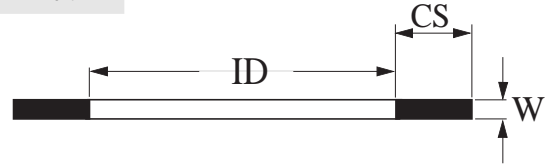

ID	C.S.	W	MBT	MBU
25.0	3.0	1.5	\$.90	
25.5	3.0	1.5	1.00	
26.0	3.0	1.5	1.00	
28.0	3.0	1.5	1.00	
29.0	3.0	1.5	1.00	
30.0	3.0	1.25	1.00	
30.0	3.0	1.5	1.00	
30.0	3.0	2.3	4.27	
31.0	3.0	1.5	1.00	
31.5	3.0	1.5	1.06	
32.0	3.0	1.5	1.06	
34.0	3.0	1.5	1.16	
35.0	3.0	1.5	1.16	
35.5	3.0	1.5	1.16	
36.0	3.0	1.5	1.16	
38.0	3.0	1.5	1.21	
39.0	3.0	1.5	3.82	
40.0	3.0	1.5	1.21	
41.0	3.0	1.5	1.21	
42.0	3.0	1.5	1.21	
44.0	3.0	1.5	3.87	
45.0	3.0	1.5	1.37	
46.0	3.0	1.5	1.37	
48.0	3.0	1.5	1.37	
49.0	3.0	1.5	5.77	
50.0	3.0	1.5	1.37	
47.0	3.5	1.1		\$ 3.78
56.0	3.5	1.25		12.22
62.0	3.5	1.1	16.68	
66.0	3.5	1.2		11.94
70.0	10.0	3-C2	10.45	
72.0	3.5	1.25		11.94
76.0	3.5	1.1		17.44
22.0	4.0	1.0	3.23	
25.0	4.0	1.0	3.77	
32.0	4.8	1.5	5.44	
30.0	5.0	1.5	3.87	
32.0	5.0	2.0	5.03	
35.0	5.0	1.5	4.03	
35.0	5.0	2.0	5.03	
35.0	5.0	3.0	10.56	

ID	C.S.	W	MBT	MBU
40.0	5.0	0.5	\$ 4.44	
40.0	5.0	1.5	4.13	
40.0	5.0	1.7		\$.64
40.0	5.0	2.0	8.33	
40.0	5.0	3.0	7.50	
45.0	5.0	1.5	3.87	
45.0	5.0	2.0	8.67	
45.0	5.0	3.0	10.56	
45.0	5.0	6.0	27.17	
50.0	5.0	1.5	4.19	
50.0	5.0	1.7		.72
50.0	5.0	1.9	5.28	
50.0	5.0	3B	11.20	
50.0	6.5	3-B4	11.67	
50.0	8.0	3.0	9.44	
53.0	5.0	1.7		.66
53.0	5.0	2.0	2.59	
55.0	5.0	1.5	4.24	
55.0	5.0	1.7		.76
56.0	5.0	2.0	2.61	
60.0	5.0	1.5	4.29	
60.0	5.0	1.7		.71
60.0	5.0	2.0	4.56	
65.0	5.0	1.5	4.40	
70.0	5.0	1.5	4.56	
70.0	5.0	2.0	4.61	
70.0	5.0	2.5		.71
70.0	5.0	3.0	11.00	
75.0	5.0	1.5	4.66	
75.0	5.0	1.7		1.59
75.0	5.0	2ST	7.06	
75.0	5.0	3.0	11.93	
78.0	5.0	1.7		.93
79.0	5.0	6.0	28.28	
80.0	5.0	1.7		1.07
80.0	5.0	2.0	4.93	
80.0	5.0	3.0	12.50	
85.0	5.0	1.7		1.15
85.0	5.0	2.0	4.90	
90.0	5.0	1.7		1.05
90.0	5.0	2.0	6.10	

METRIC - BACK-UP RINGS

Back-up Rings

Ordering Information

Part Number: Prefix - ID X CS X W

Example: MBT - 18 X 2 X 1.5


MBT Manufactured in PTFE./MBU in Urethane

Sizes are in stock where prices are shown.

Temperature Range: -40 to +500° F

Back Up Ring C/S O-Ring C/S

2.5	3.1
3.0	3.5
5.0	5.7
7.5	8.4

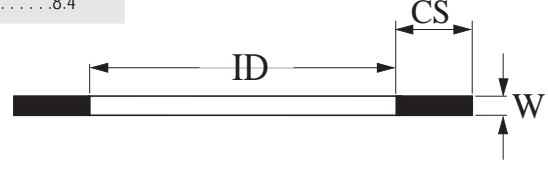

ID	C.S.	W	MBT	MBU
95.0	5.0	1.7		\$ 1.08
95.0	5.0	2.0	\$ 6.06	
100.0	5.0	1.7		1.09
100.0	5.0	2.0	6.22	
105.0	5.0	2.0	6.42	
110.0	5.0	1.7		1.48
110.0	5.0	2.0	11.51	
115.0	5.0	1.7		1.50
115.0	5.0	2.0	6.71	
120.0	5.0	1.7		1.70
120.0	5.0	2.0	6.77	
125.0	5.0	2.0	7.01	
130.0	5.0	1.7		1.57
130.0	5.0	2.0	7.07	
135.0	5.0	2.0	7.24	
140.0	5.0	1.7		1.60
140.0	5.0	2.0	7.36	
145.0	5.0	1.7		1.84
145.0	5.0	2.0	7.54	
150.0	5.0	1.7		1.66
150.0	5.0	2.0	6.31	
155.0	5.0	1.7		2.64
155.0	5.0	2.0	6.41	
160.0	5.0	1.7		3.04
160.0	5.0	2.0	6.63	
165.0	5.0	2.0	6.68	
170.0	5.0	1.7		3.06
170.0	5.0	2.0	6.68	
175.0	5.0	2.0	6.78	
180.0	5.0	1.7		3.14
180.0	5.0	2.0	7.16	
180.0	5.0	2.5	11.50	
185.0	5.0	2.0	7.37	
190.0	5.0	1.7		3.16
190.0	5.0	2.0	7.37	
195.0	5.0	2.0	15.00	
214.0	5.0	2.0	15.83	
215.0	5.0	2.0	16.00	
220.0	5.0	2.0	21.11	
240.0	5.0	2.0	26.02	
275.0	5.0	2.0	35.00	

ID	C.S.	W	MBT	MBU
290.0	5.0	1.9	\$ 36.44	
45.0	5.5	0.5	3.63	
30.0	6.5	3.0	6.40	
40.0	6.5	2.0	6.00	
42.0	6.5	2.0	4.40	
50.0	6.5	2.0	6.96	
55.0	6.5	3S-B4	13.50	
60.0	6.5	3STB	8.50	
70.0	6.5	3STB	9.56	
40.0	7.5	3.0	7.90	
48.0	7.5	2.0	5.67	
50.0	7.5	2.0	4.51	
50.0	7.5	3.0	6.67	
50.0	7.5	0.6	3.33	
55.0	7.5	2.0	4.72	
55.0	7.5	3-C2	8.06	
50.0	7.5	0.5	10.56	
60.0	7.5	0.5	10.56	
60.0	7.5	3.0	10.50	
65.0	7.5	2.0	5.90	
65.0	7.5	3.0	15.34	
70.0	7.5	2.0	6.25	
75.0	7.5	2.0	5.65	
75.0	7.5	3.0	14.56	
80.0	7.5	3.0	12.40	
85.0	7.5	2.0	5.25	
90.0	7.5	2.0	5.41	
90.0	7.5	3.0	15.56	
95.0	7.5	2.0	6.06	
100.0	7.5	1.5	5.35	
105.0	7.5	2.0	6.48	
115.0	7.5	2.0	11.05	
145.0	7.5	2.1		\$ 2.37
145.0	7.5	2.5		2.39
150.0	7.5	2.75	16.26	
155.0	7.5	1.7		10.06
155.0	7.5	2.0	12.80	
155.0	7.5	2.75	16.26	
160.0	7.5	2.75	16.26	
165.0	7.5	2.0	13.50	
170.0	7.5	2.0	14.60	

Back-up Rings

Ordering Information

Part Number: Prefix - ID X CS X W


Example: MBT - 18 X 2 X 1.5

MBT Manufactured in PTFE./MBU in Urethane

Sizes are in stock where prices are shown.

Temperature Range: -40 to +500° F

Back Up Ring C/S	O-Ring C/S
2.5	3.1
3.0	3.5
5.0	5.7
7.5	8.4

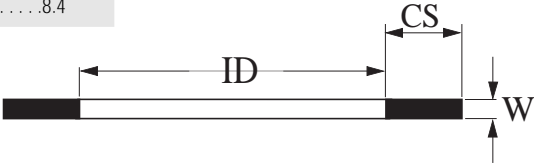

ID	C.S.	W	MBT	MBU
170.0	7.5	2.75	\$ 14.48	
175.0	7.5	2.0	16.80	
175.0	7.5	2.75	20.00	
180.0	7.5	2.1		\$ 2.80
180.0	7.5	2.75	14.48	
185.0	7.5	2.75	14.48	
190.0	7.5	2.0	17.25	
190.0	7.5	2.75	21.15	
200.0	7.5	2.0	18.60	
200.0	7.5	2.1		3.06
200.0	7.5	2.75	21.15	
205.0	7.5	2.75	22.75	
209.0	7.5	2.75	22.75	
210.0	7.5	2.5	18.90	
210.0	7.5	2.75	22.75	
215.0	7.5	2.75	22.75	
215.0	7.5	3.0	22.75	
220.0	7.5	2.75	25.47	
220.0	7.5	3.0	25.47	
225.0	7.5	2.5	24.80	
225.0	7.5	2.75	25.47	
230.0	7.5	2.75	29.21	
235.0	7.5	2.75	32.46	
240.0	7.5	2.75	38.95	
255.0	7.5	2.75	42.22	
260.0	7.5	2.75	48.71	
265.0	7.5	2.75	48.71	
275.0	7.5	2.75	58.48	
280.0	7.5	2.75	58.48	
285.0	7.5	2.75	58.48	
290.0	7.5	2.75	64.97	
295.0	7.5	2.75	64.97	
300.0	7.5	2.75	71.46	
315.0	7.5	2.75	81.23	
32.0	8.0	3.0	7.89	
55.0	10.0	3.0	16.06	
65.0	10.0	3.0	11.67	
65.0	10.0	3.0B	16.60	
80.0	10.0	3.0	12.50	
84.0	10.0	2.5	9.06	
85.0	10.0	3.0	12.00	

ID	C.S.	W	MBT	MBU
90.0	10.0	3.0	\$ 12.50	
95.0	10.0	3.0	13.00	
100.0	10.0	3.0	13.52	
105.0	10.0	3.0	14.00	
110.0	10.0	3.0	15.50	
120.0	10.0	3.0	16.00	
130.0	10.0	3.0	17.25	
140.0	10.0	3.0	17.56	
150.0	10.0	3.0	18.00	
160.0	10.0	3.0	19.50	
100.0	12.5	3.0	13.52	
420.0	15.0	5.0	212.59	

METRIC - BACK-UP RINGS